



SUBMITTAL INFORMATION

Uni-Flange® SO-EZ Gasket™ - (SO-EZ-x style)



UNI-FLANGE® SERIES SO-EZ GASKET™ FOR USE IN MECHANICAL JOINT CONNECTIONS

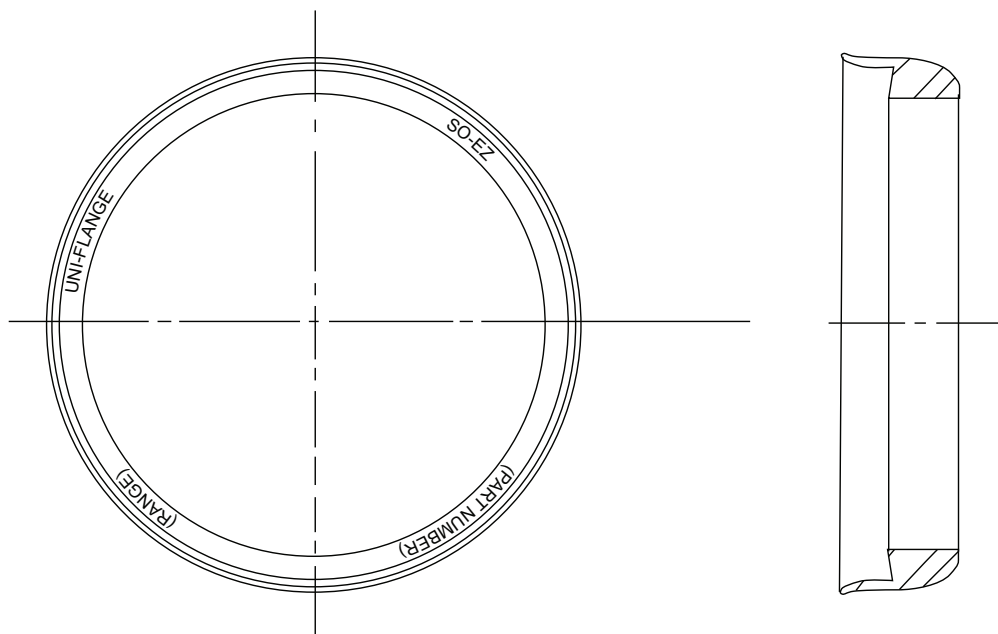

NOM. PIPE SIZE	PIPE O.D. RANGE	CATALOG NUMBER	✓ SUBMITTED ITEMS
3"	3.50 - 3.96	SO-EZ-3	
4"	4.50 - 4.80	SO-EZ-4	
6"	6.63 - 6.90	SO-EZ-6	
8"	8.63 - 9.05	SO-EZ-8	
10"	10.75 - 11.10	SO-EZ-10	
12"	12.75 - 13.20	SO-EZ-12	

For Buna-N, add "-N" to the end of the part number.

Example: SO-EZ-3-N

FEATURES

- 3" - 12" snaps on to any mechanical joint gland meeting AWWA C111 or AWWA C153
- Can be used with any class of ductile iron pipe, C900 PVC, ASTM D2241 IPS PVC, or C909/HDPE (with insert stiffener)
- SBR rubber per ASTM D2000 – classified by UL to meet NSF 61
- Optional Buna-N per ASTM D2000
- Meets properties of AWWA C111
- Rated as high as 350 psi depending on pipe type and application

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

03/08/18

Submitted By: