

	No.	DESCRIPTION	MATERIAL
	1	CAP	CAST BRASS ASTM B62 ALLOY C83600
	2	PIN	BRASS ASTM B16 ALLOY C36000
	3	KEY	CAST LOW LEAD BRASS ALLOY
	4	O-RING	EPDM ASTM D2000
	5	BODY	CAST LOW LEAD BRASS ALLOY
	6	PLAIN NUT	CAST BRASS ASTM B62 ALLOY C83600
	7	SNAP RING	PHOS BRONZE
	8	RUBBER GASKET	NITRILE ASTM D2000
*	9	O-RING	EPDM ASTM D2000
*	10	SWIVEL BUSHING	CAST LOW LEAD BRASS ALLOY
	11	CS TUBE NUT	CAST BRASS ASTM B62 ALLOY C83600

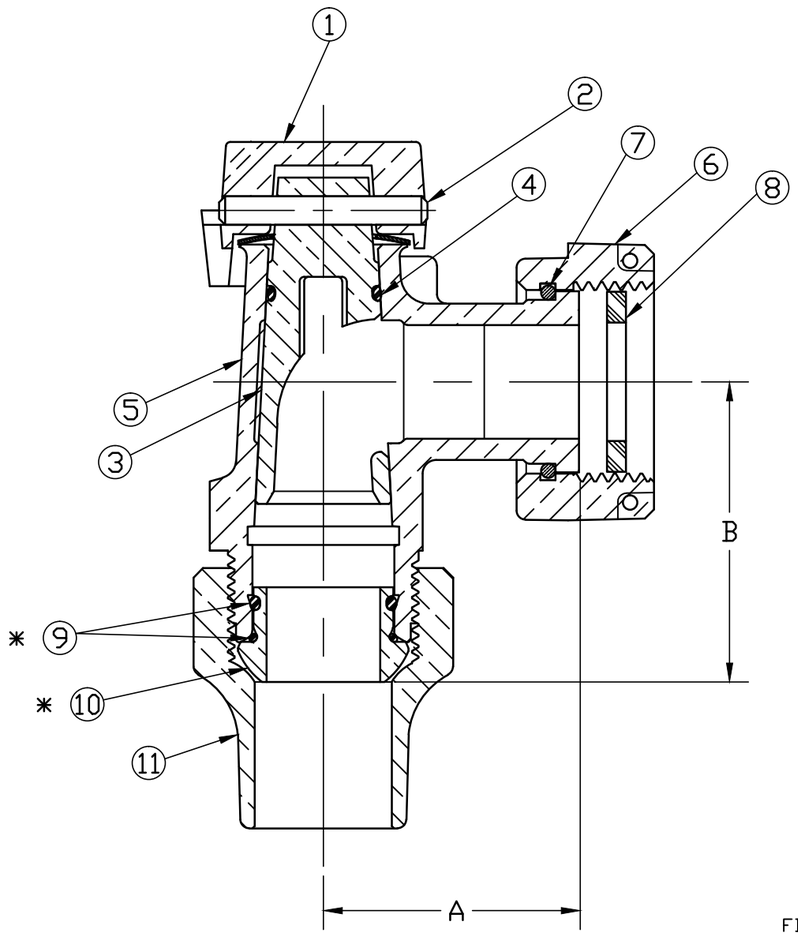

5/8x3/4x3/4" IS A (*)
(2) PC CONSTRUCTION
(AS SHOWN ABOVE)

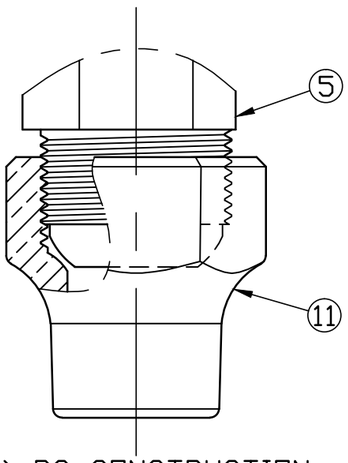

(1) PC CONSTRUCTION

METER CONNX SIZE	A	B
5/8x3/4x3/4	1-11/16"	1-63/64"
1x3/4	1-11/16"	1-29/32"
1	1-31/32"	1-61/64"

FILEPATH: PROD-ENG\JJ\SUBMITTALS\E1525

REV	ECR	DESCRIPTION	DATE	BY	CHKR

DRFTR	RWB	2/4/10
CHKR		
ENGR		
MGR		
	BY	DATE

STK No:

MAT'L:

DESCR. GROUND KEY LLB ANGLE METER VALVE (COPPER FLARE NUT x MTR SWIVEL NUT)

PART NUMBER E1525

JAMES JONES CO.

UNLESS OTHERWISE NOTED
SURFACE PREPARATION:
BREAK CORNER(S) ---- .000
SURFACE FINISH -- 000 RMS
TOLERANCE(S):
LINEAR ---------- ± .000
ANGULAR --------- ± 0°00'

THIRD ANGLE PROJECTION

REF. No.

SCALE

PART NUMBER E1525

JJ-MRKTG