
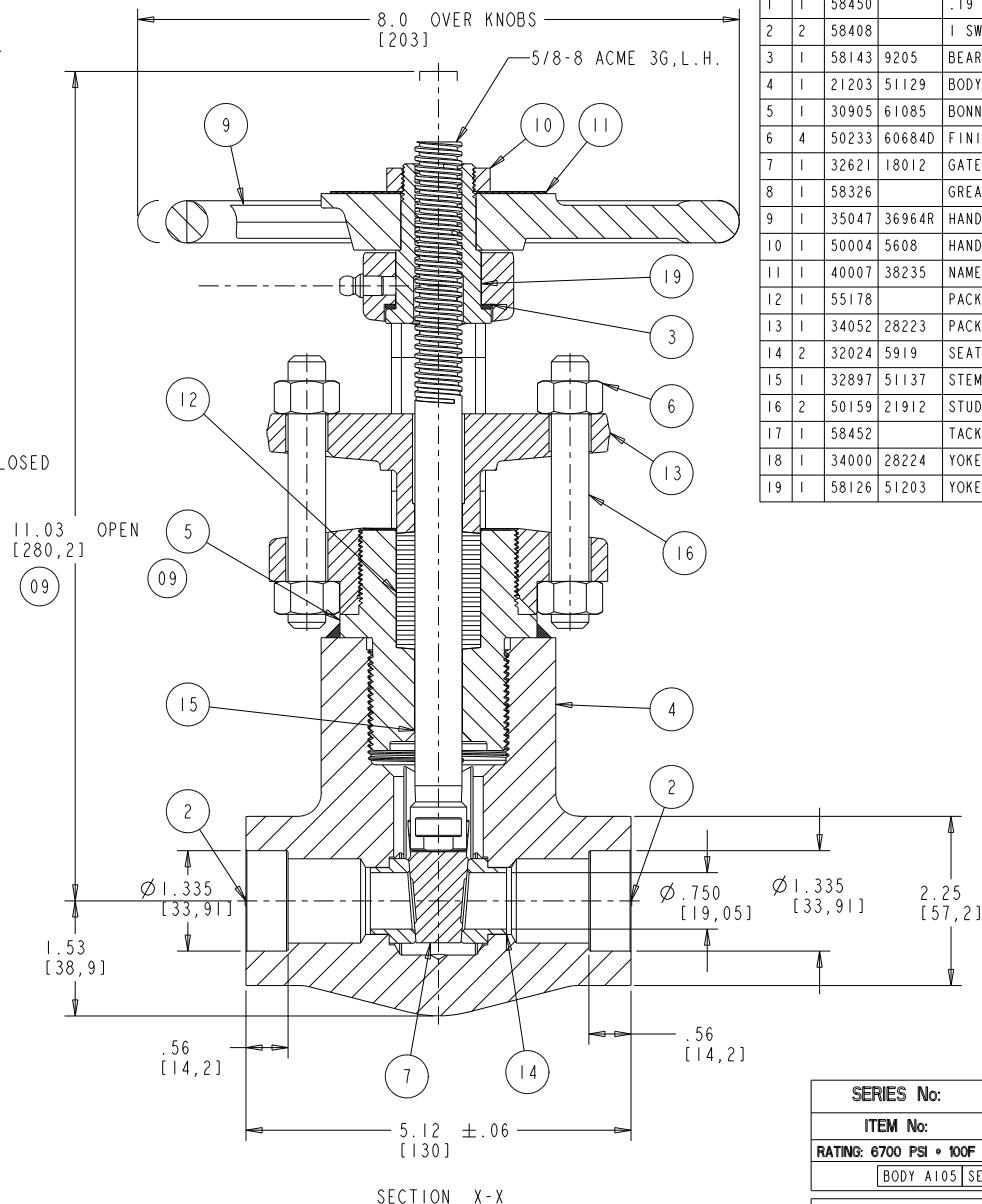


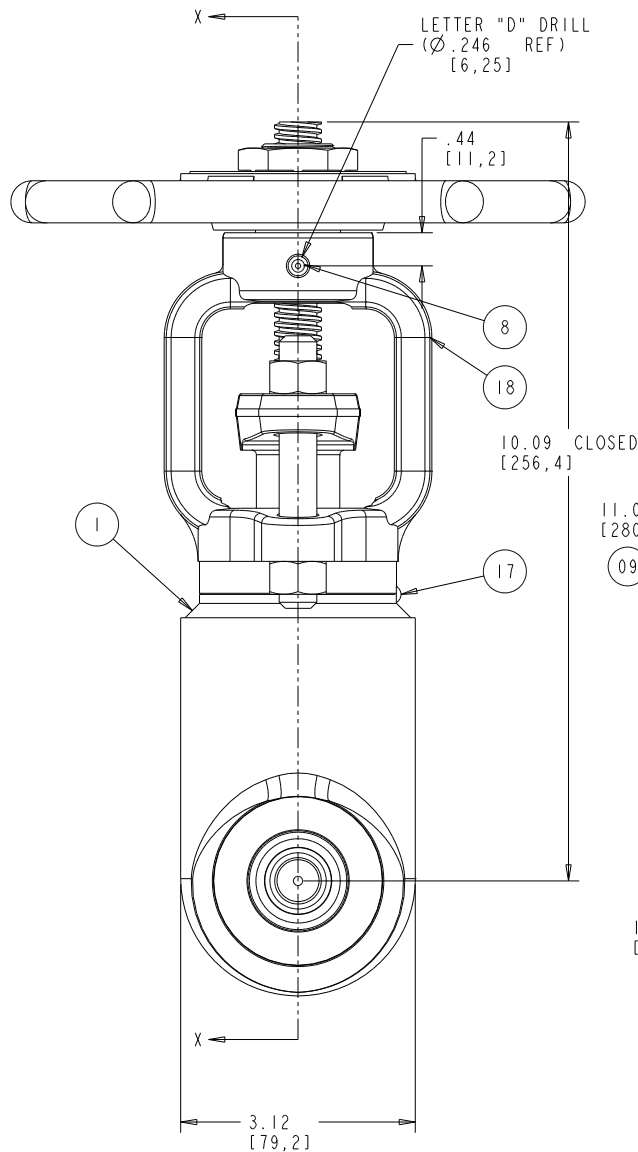

ITEM	QTY	ITEM NO	DRAWING	PART NAME	MATERIAL
1	1	58450		.19 SEAL WELD	(RMP61701)
2	2	58408		1 SW PROTECTOR	POLYETHYLENE
3	1	58143	9205	BEARING RING	AMPCO ALUM BRONZE
4	1	21203	51129	BODY	A105
5	1	30905	61085	BONNET	A105
6	4	50233	60684D	FINISHED HEX NUT	F594 304SS
7	1	32621	18012	GATE	CAST COBALT
8	1	58326		GREASE FITTING	MFG. STD.
9	1	35047	36964R	HANDWHEEL	MALLEABLE IRON
10	1	50004	5608	HANDWHEEL NUT	A105
11	1	40007	38235	NAME PLATE(GREEN)	ALUMINUM
12	1	55178		PACKING CARTRIDGE	FLEXIBLE GRAPHITE
13	1	34052	28223	PACKING GLAND	A105
14	2	32024	5919	SEAT RING	A479 TYPE 410 HF
15	1	32897	51137	STEM	A479 TYPE 410
16	2	50159	21912	STUD BOLT	F593 304SS
17	1	58452		TACK WELD	(RMPWPS555)
18	1	34000	28224	YOKE	A105
19	1	58126	51203	YOKE NUT	A582 TYPE 416

NOTE:
PRESS SEATS PER RMPVFSPP024
PHOSPHATE PER RMP61012.
GATE VALVE TO BE TESTED PER API-598 PER RMPVFLT003

	X.XX	Inches
	[XX, X]	MM
WEIGHT	20.3 LBS	9.20 Kg
Cv FACTOR		16.1

CNS	58561	DWN BY	R.Jackson
REV	09	CHK BY	S.B.R.
BY	R.Jackson	RVD BY	
DATE	1-19-2005	DATE	11-29-78

SERIES No:	SW66703-06
ITEM No:	20F580
RATING: 6700 PSI • 100F	SPECS: ASME B16.34 LTD
BODY A105	SEAT HF
DISC CC	STEM 13CR

FLOWERVE Vogt Valves
SULPHUR SPRINGS, TEXAS, USA
1 GATE VALVE - FORGED STEEL OS&Y - MALE THREAD SEAL WELD BONNET - RENEWABLE SEATS - NON-ROTATING STEM SOCKET WELD ENDS - CLASS 2680
51122-2