


1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.

- 2 SLIT AND SHORTEN O-RING BY .13" TO .20" IN LENGTH BEFORE INSTALLING.
- 3 SLIT O-RING BEFORE INSTALLING.
- 4 INSTALLATION TORQUE: 8 - 14 LB-FT.
- 5 WATER TEST WHOLE UNIT.
- 6 SEE DETAIL 'A' FOR INSTALLATION ORIENTATION.
- 7 BAG 5-007 IN A SEPARATE BAG.
- 8 APPLY THIN FILM OF DOW CORNING III.
- 9 APPLY LOCTITE 242.
- 10 APPLY LOCTITE 680.
- 11 INSTALLATION TORQUE: 10 - 14 LB-IN.

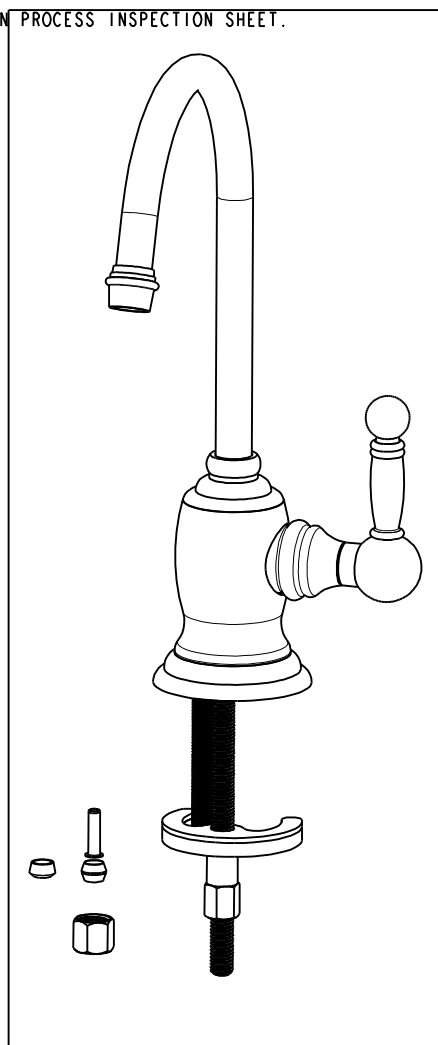

BILL OF MATERIAL (CURRENT LEVEL)				
ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY
1	1-134	CARTR 3/8 HOT 1/4 TR	PART	1
2	5-007	1/4 COMP KIT	ASSEMBLY	1
3	10514	MOUNTING CRESCENT	PART	1
4	10516	MOUNTING NUT	PART	1
5	10661	MOUNTING STUD	PART	1
6	11833	ADAPTER	PART	1
7	12589	WATER DISP LEVER HUB (TRAD)	PART	1
8	12716	ESCUTCHEON	PART	1
9	50703	WATER DISP. BODY (TRAD.)	PART	1
10	50705	WATER DISP BODY CAP	PART	1
11	50706	WATER DISP SPOUT RET RING	PART	1
12	50708	WATER DISP HDL BONNET (TRAD)	PART	1
13	50711	LEVER HANDLE	PART	1
14	50712	WATER DISP SPOUT SHELL	PART	1
15	50713	SPOUT, WATER DISP. (TRAD.)	PART	1
16	50714	WATER DISP. CAR.T HOLDER	PART	1
17	50760	NIPPLE WATER DISP	PART	1
18	91017	O-RING, #2- 012, EPDM, 65-75 DURO, NSF 61	PART	2
19	91063	MOUNTING CRESCENT GASKET	PART	1
20	91217	O-RING, #2-020, EPDM, 65-75 DURO, NSF 61	PART	1
21	91382	O-RING, #2- 012, TEFLON,	PART	1
22	91383	O-RING, #2- 014, TEFLON, NSF 61	PART	1
23	91762	O-RING, #2-132, EP, 50 DURO - GREY	PART	1
24	92000	SCREW 8 - 32 X 1/8 SS	PART	1
25	92192	SCRW, 10-32 X 5/8 SKT HD CUP PT SS	PART	1
26	92477	SCRW, M4 X 16 SKT FLT HD SS	PART	1

-	K	EN-4300jj	04/12/21	R. S.
-	J	EN-3722	02/08/19	C.G.
-	H	EN-3257D	10/05/17	V. VU
-	F	EN-2601	09/16/13	-
-	E	EN-2528	05/08/13	-
-	D	EN-2186	06/20/12	-
-	C	EO-0936	01/29/08	-
-	B	EO-0478	02/16/05	-
-	A	EO-0461	12/15/04	-
-	-	EO-0441	11/18/04	-
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

		-	-
TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING	FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES	

UNITS ARE: INCHES [MM]
TOLERANCES ARE:

TOLERANCES ARE:		ANGLE
FRACTIONS	DECIMALS	11°

$\pm 1/16"$	X $\pm .1$	(2,5)	$\pm 1"$
	XX $\pm .06$	(1,5)	

X.XXX DENOTES CRITICAL DIMS.
ALL THREADS ARE CRITICAL

DRAWN	JINSON	02/08/
-------	--------	--------

CHECKED	C.G.	02/08/
---------	------	--------

APPROVED	C. G.	02/08/
----------	-------	--------


BRASSTECH
INCORPORATED

2001 CARNEGIE AVE.
SANTA ANA, CA 92705
(949) 417-5207


COLD WATER DISP, LEVER
TRAD

DWG NO.	107C	REV	K
---------	------	-----	---

SCALE	300	REF. -	SHEET	OF	3
-------	-----	--------	-------	----	---

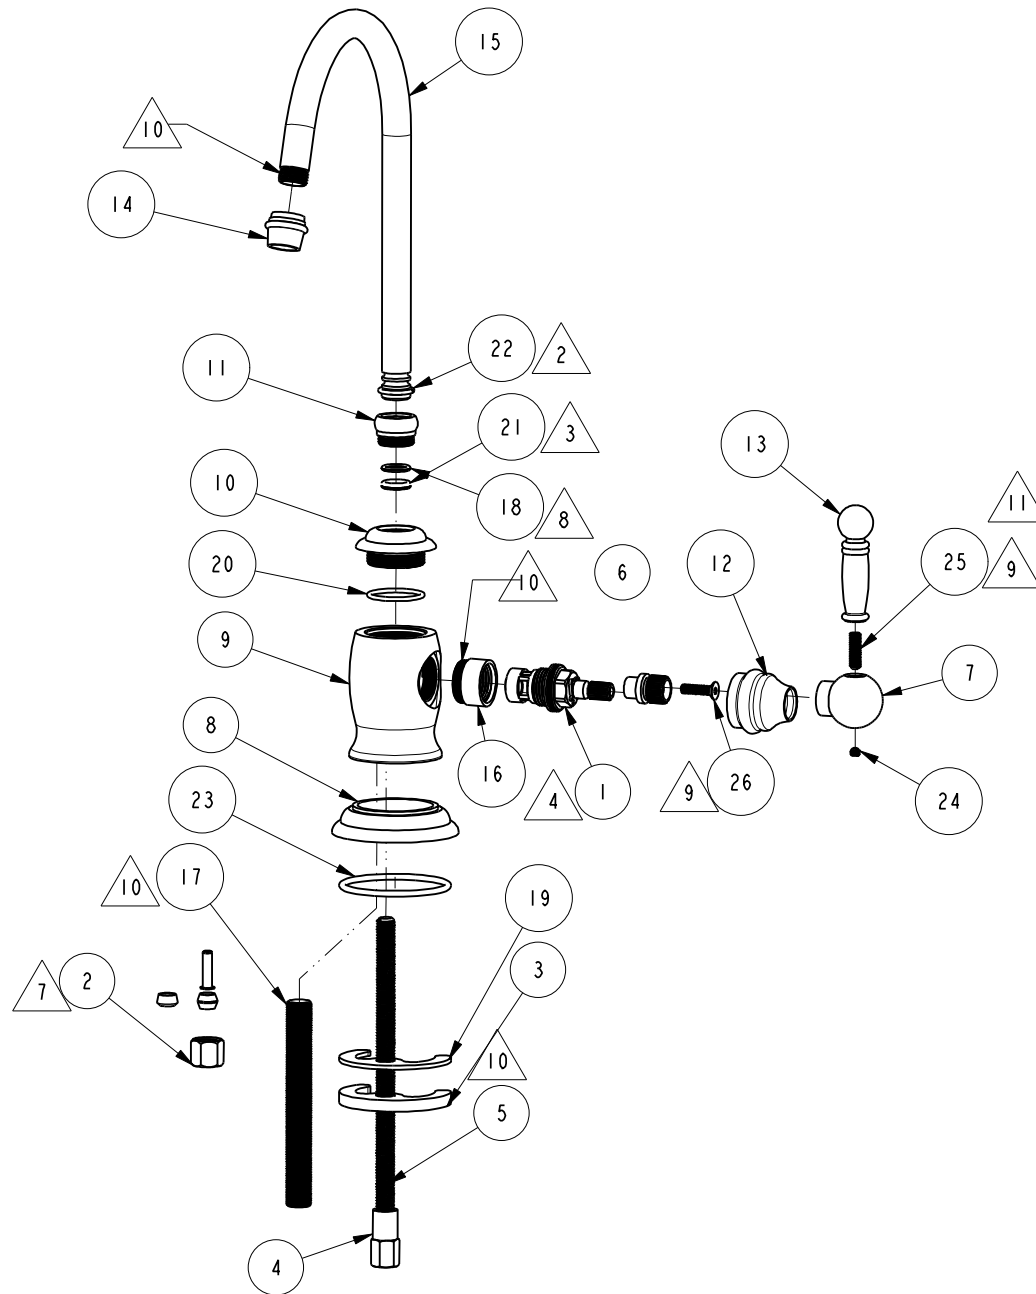

BRASSTECH INCORPORATED			2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207
DWG NO.	107C	REV K	
SCALE .300	REF. -	SHEET 2	OF 3

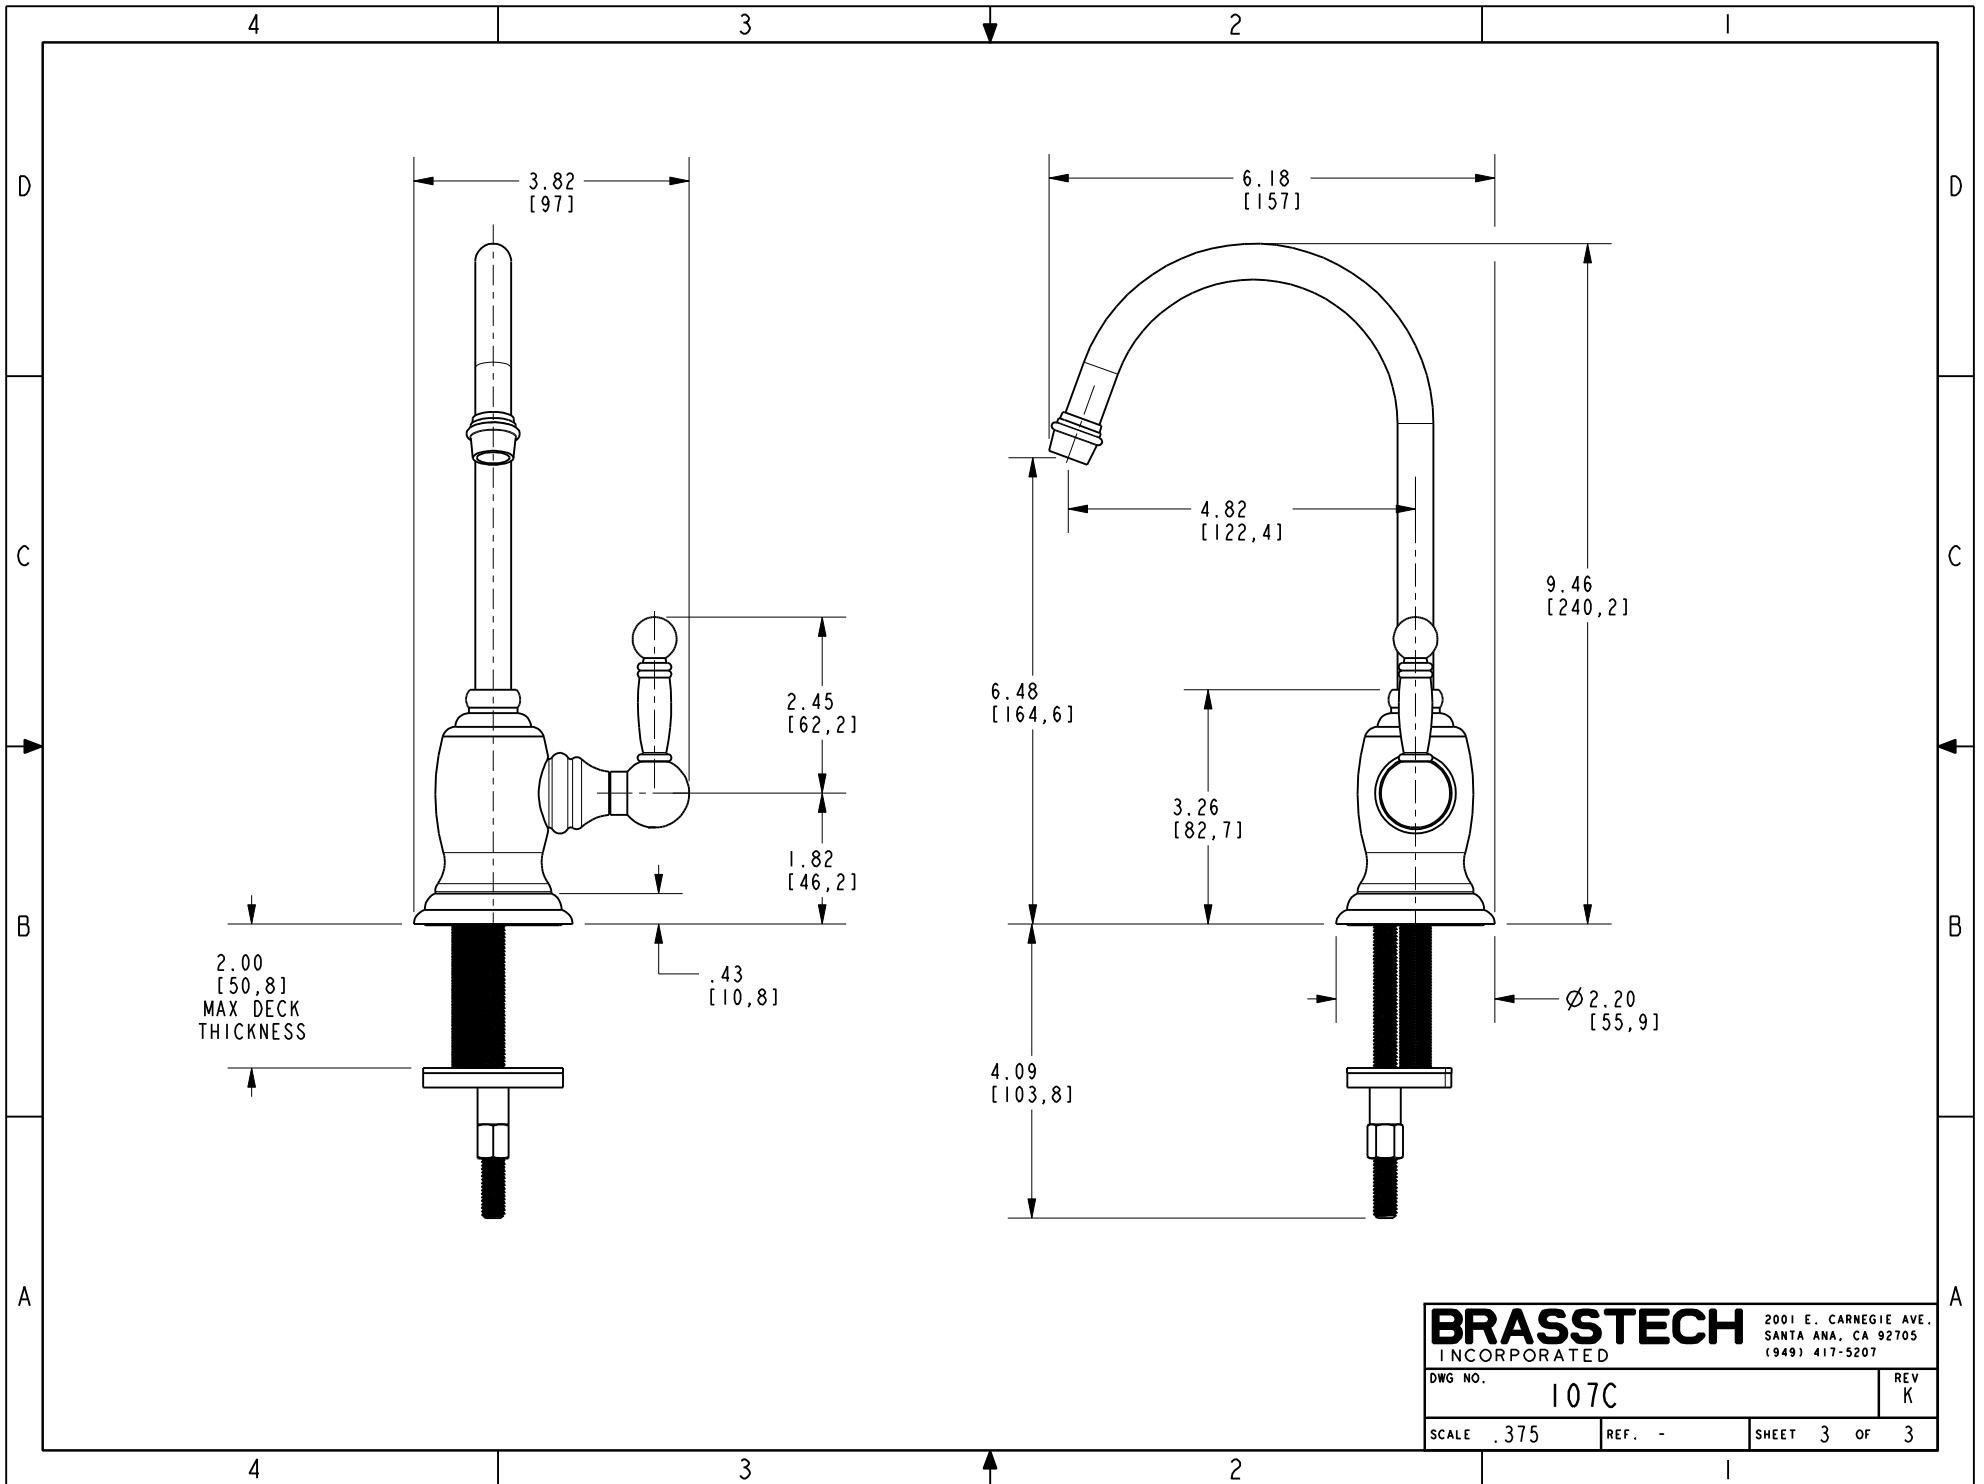

BRASSTECH INCORPORATED		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
DWG NO.	107C	REV	K
SCALE	.375	REF.	-
SHEET 3		OF 3	