

GLOBE 570 BRONZE

200 lb. SWP-400 lb. WOG† • General Service
Bronze Regrinding Disc • Union Bonnet • Gland Packed • Threaded Ends

SPECIFICATIONS

570

Conforms to: MSS SP-80. Type 1,
Class 200, Threaded Ends.

MATERIAL LIST


NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 61
2	Bonnet	Bronze	ASTM B 61
3	Disc	Bronze	ASTM B 61
4	Stem	Bronze	ASTM B 61
5	Union Bonnet Nut	Bronze	ASTM B 61
6	Packing	Non-Asbestos	Commercial
7	Gland	Brass	ASTM B 124 C37700
8	Packing Nut	Brass	ASTM B 16
9	Handwheel	Mall. Iron	Commercial
10	Identification Plate	Aluminum	Commercial
11	Handwheel Nut	Brass	Commercial
12	Disc Ring	Bronze	Commercial

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C	C _v
Inches	1/8	2.06	4.00	2.00	0.61
mm	3.2	52.4	101.6	50.8	
Inches	1/4	2.06	4.00	2.00	1.16
mm	6.4	52.4	101.6	50.8	
Inches	3/8	2.06	4.25	2.00	2.21
mm	9.5	52.4	108.0	50.8	
Inches	1/2	2.44	4.63	2.50	3.64
mm	12.7	61.9	117.5	63.5	
Inches	3/4	2.94	5.19	2.75	6.65
mm	19.1	74.6	131.8	69.9	
Inches	1	3.75	6.38	3.13	11.10
mm	25.4	95.3	161.9	79.4	
Inches	1 1/4	4.25	7.00	3.50	20.00
mm	31.8	108.0	177.8	88.9	
Inches	1 1/2	4.75	7.69	4.00	28.00
mm	38.1	120.7	195.3	101.6	
Inches	2	5.75	9.00	4.75	48.00
mm	50.8	146.1	228.6	120.7	
Inches	2 1/2	6.75	10.25	5.50	70.00
mm	63.5	171.5	260.4	139.7	
Inches	3	8.00	12.00	6.00	111.00
mm	76.2	203.2	304.8	152.4	

† Non-Shock

Rev. 5

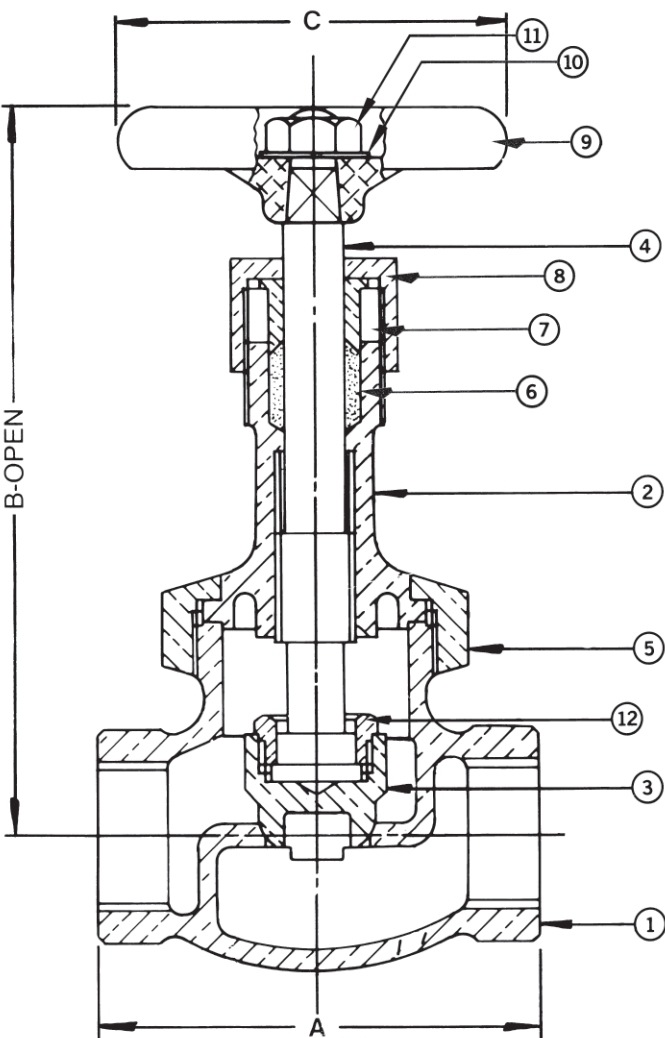

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com