



6" TC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

V6TC W

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain socket with nickel-plated copper screw shell
 • Adjustable socket bracket and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps or insulation
 • UL/cUL Listed • Trims V3020, V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION



Bar Hangers Telescoping bar hangers with captive nail allow for quick placement of housing anywhere within 24" O.C. joists • Can be installed in suspended ceiling grid using T-bar clip accessory • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Edge-mounted for extra strength and captive to mounting frame
 • May be installed either perpendicular or parallel to junction box • Locking set screw locks fixture in position • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, UL/cUL listed for through-branch wiring, maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Push-in electrical connectors included.

Mounting Frame 24-gauge die-formed galvanized steel mounting frame
 • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Housing TC housing, .028" aluminum • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

DIMENSIONS

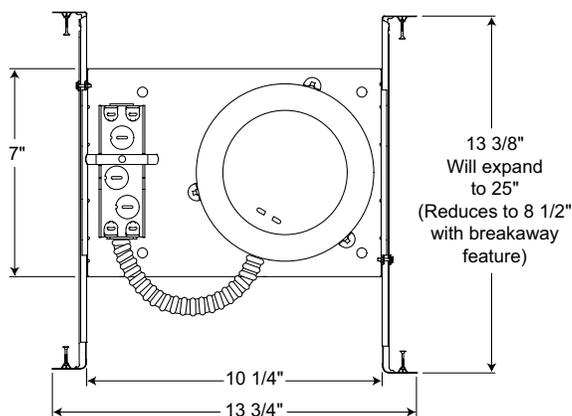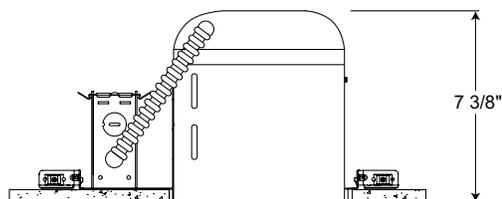

6 1/2" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
G2405	T-Bar Clips (Set of 4)

To order, specify catalog number

PRODUCT CODES

Catalog No.	Input Voltage	Lamp Rating (max.)
V6TC W	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

6" TC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

V6TC W

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V3024 WWH	Conical White Baffle	75W PAR30, 75W PAR30L, 65W BR30
	V3024 BWH	Conical Black Baffle	120W BR40
	V3025 WWH	Straight White Baffle	75W PAR30, 75W PAR30L, 65W BR30
	V3025 BWH	Straight Black Baffle	120W BR40, 120W PAR38
	V3034 WWH◆◆	Full White Baffle	60W A19 (white only), 75W PAR30, 75W PAR30L, 85W BR30, 120W BR40, 150W PAR38 (white only), 75W PAR38 (black max.)
	V3034 BWH◆◆	Full Black Baffle	
	V3034T WWH◆◆	Full White Baffle with Torsion Springs	
	V3034T BWH◆◆	Full Black Baffle with Torsion Springs	
	V3027 CWH	Clear Cone	75W PAR30, 75W PAR30L, 65W BR30 90W BR40
	V3037 WWH◆◆	Full White Cone	60W A19, 75W PAR30, 75W PAR30L 85W BR30, 120W BR40, 150W PAR38
	V3037T WWH◆◆	Full White Cone with Torsion Springs	
	V3029 WH	White Eyeball	75W PAR30, 75W PAR30L, 65W BR30
	V3020 PW◆	Stippled Opal Lens Shower	40W A19, 75W PAR30, 75W PAR30L 65W BR30, 75W PAR38
	V3040N PW◆	Stippled Opal Lens Shower with Reflector	75W A19
	V3041 PW◆	Drop Opal Lens Shower with Reflector	100W A19
	V3050 WH	Open Frame	65W BR30

Trim Size: 7³/₄" O.D. (except Cat. Nos. V3034, V3037 - 7⁵/₈" O.D., Cat. Nos. V3020, V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.