



SUBMITTAL INFORMATION

Grip Joint Tee - (T444-xxx-AWT-G-NL style)



GRIP JOINT FOR CTS ON BOTH ENDS BY GRIP JOINT FOR CTS SIDE OUTLET, ASSEMBLED WATERTIGHT

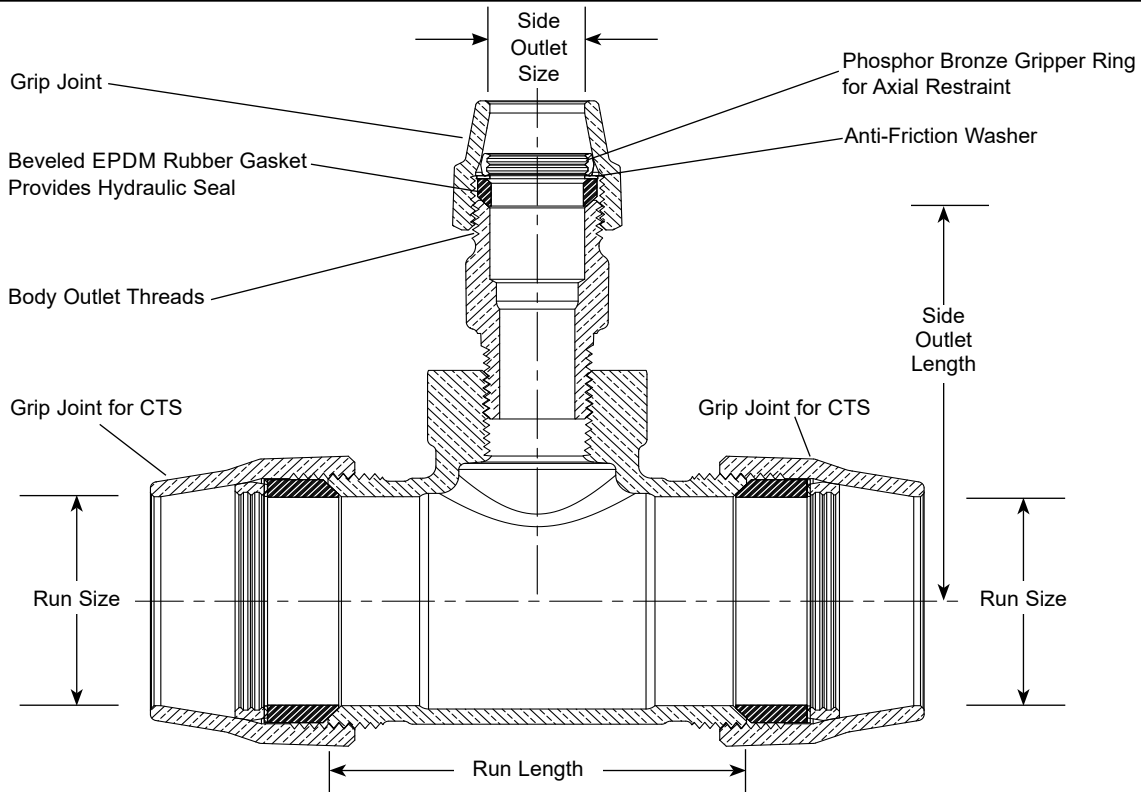

BOTH ENDS (RUN SIZE)	SIDE OUTLET SIZE	RUN LENGTH	SIDE OUTLET LENGTH	APPROX Wt. LBS.	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	1-1/2"	3-5/8"	3-7/8"	3.2	T444-336-AWT-G-NL	
1-1/4"	1-1/4"	7-15/32"	3-13/16"	4.7	T444-555-AWT-G-NL	
1-1/2"	3/4"	4"	3-15/32"	3.6	T444-663-AWT-G-NL	
1-1/2"	1"	4"	3-43/64"	3.8	T444-664-AWT-G-NL	
2"	3/4"	4"	4-1/8"	4.9	T444-773-AWT-G-NL	

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Grip joints include beveled EPDM rubber gaskets that provide a hydraulic seal when tightened

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/12/17

Submitted By: