



SUBMITTAL INFORMATION

70 Series Coppersetter - (VBHC74-xxW-44-44-Q-NL style)



ANGLE BALL VALVE BY ANGLE CARTRIDGE DUAL CHECK VALVE (1" METER)

QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

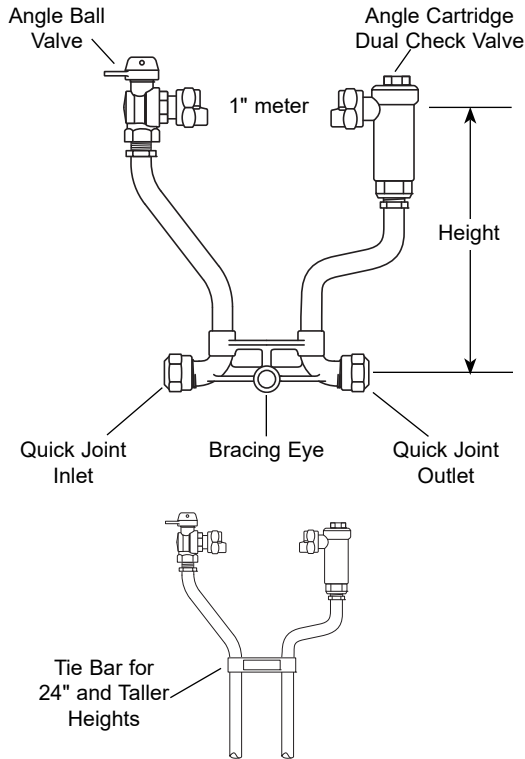

Coppersetter Part Number

HEIGHT (INCHES)	APPROX. Wt. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
12	11.0	VBHC74-12W-44-44-Q-NL	
15	11.0	VBHC74-15W-44-44-Q-NL	
18	11.3	VBHC74-18W-44-44-Q-NL	
21	11.6	VBHC74-21W-44-44-Q-NL	
24	13.2	VBHC74-24W-44-44-Q-NL	
27	13.5	VBHC74-27W-44-44-Q-NL	
30	13.8	VBHC74-30W-44-44-Q-NL	
33	14.1	VBHC74-33W-44-44-Q-NL	
36	14.4	VBHC74-36W-44-44-Q-NL	
39	14.7	VBHC74-39W-44-44-Q-NL	
42	15.0	VBHC74-42W-44-44-Q-NL	

Service Line Size

INLET	OUTLET
1" (CTS) Q.J.	1" (CTS) Q.J.

Note: Ford recommends using insert stiffeners with plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- Saddle nuts hold the meter in place for tightening
- Bracing eye is standard on all 70 Series Coppersetters
- Tie bar is standard for 24" and taller Coppersetter heights (VBHC74 Series)
- 1-1/8" copper risers provide more flow capacity
- All Ford® Setters are assembled with lead-free solder
- ASSE 1024 approved dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

09/20/19

Submitted By: