




# 2" DZR Brass Male Sweat X PEX Adapter QQ\_\_DZX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

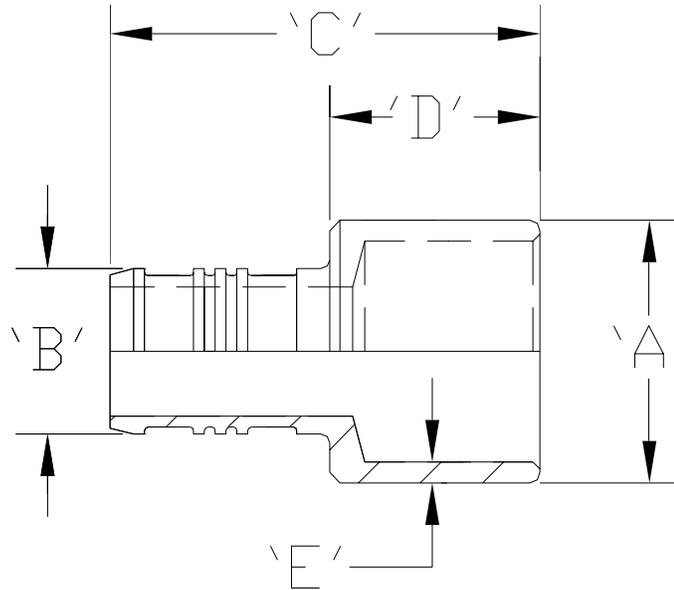

Part Number	Description	'A'	'B'	'C'	'D'	'E'
QQ905DZX	1-1/2" Male Sweat x 2" PEX Barb	1.62" [41.1]	1.602" [40.7]	3.03" [77.0]	1.16" [29.5]	0.10" [2.5]
QQ975DZX	2" Male Sweat x 2" PEX Barb	2.12" [53.9]	1.602" [40.7]	3.10" [78.7]	1.60" [40.6]	0.12" [3.0]

**Engineering Specification:** ZurnPEX® 2" DZR brass male sweat x ZurnPEX® adapters. The QQ\_\_DZX adapter is made to fit inside a wrought copper fitting. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with ZurnPEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

### Accessories

\_\_\_ **QCR8X** 2" Copper Crimp Ring

Rev.	Date: 11/14/08	C.N. No.99385
Dwg. No. 84025	Prod. No. QQ__DZX	