

SPECIFICATIONS

FIGURE E24PP - E24C - E24
SANITARY STAINLESS FITTINGS



304 STAINLESS STEEL HEX HANGER

Sanitary hex hangers are commonly used to support piping systems in hygienic applications due to their durability and ease of installation. They provide a secure method of suspending sanitary tubing while maintaining cleanability and system integrity. Designed for use with threaded rod, sanitary hex hangers are suitable for applications requiring frequent washdown and corrosion resistance.

FEATURES

- Material: 304 Stainless Steel
- Finish: Stainless
- Grommet: Vinyl

PRODUCT SPECIFICATIONS

- Complies with 3-A standards



FIGURE NUMBER MATRIX

FNW E24PP	
Size (in.)	
1/2 = D	2-1/2 = L
3/4 = F	3 = M
1 = G	4 = P
1-1/2 = J	6 = U
2 = K	

FIGURE NUMBER MATRIX

FNW E24C	
Size (in.)	
1/2 = D	2-1/2 = L
3/4 = F	3 = M
1 = G	4 = P
1-1/2 = J	6 = U
2 = K	

FIGURE NUMBER MATRIX

FNW E24	
Size (in.)	
1/2 = D	2-1/2 = L
3/4 = F	3 = M
1 = G	4 = P
1-1/2 = J	6 = U
2 = K	

SPECIFICATIONS

FIGURE E24PP - E24C - E24


SANITARY STAINLESS FITTINGS



304 STAINLESS STEEL HEX HANGER


E24PP - HEX HANGER W/ POLYPROPYLENE INSERT

Size (in.)	Item #	A (in.)	B (in.)	D ± 0.12 (in.)	E ± 0.012 (in.)	F ± 0.03 (in.)	G ± 0.12 (in.)
1/2	FNWE24PPD	2.96 ± 0.12	2.1 ± 0.12	0.50	0.14	1.00	1.00
3/4	FNWE24PPF	2.93 ± 0.12	2.14 ± 0.12	0.75	0.14	1.00	1.20
1	FNWE24PPG	3.13 ± 0.12	2.32 ± 0.12	1.00	0.14	0.98	1.48
1-1/2	FNWE24PPJ	3.68 ± 0.12	2.89 ± 0.12	1.50	0.14	0.98	2.01
2	FNWE24PPK	4.25 ± 0.12	3.46 ± 0.12	2.00	0.14	0.98	2.50
2-1/2	FNWE24PPL	4.80 ± 0.197	4.05 ± 0.197	2.50	0.14	0.98	2.95
3	FNWE24PPM	5.51 ± 0.197	4.70 ± 0.197	3.00	0.14	0.98	3.50
4	FNWE24PPP	6.75 ± 0.197	5.94 ± 0.197	4.00	0.14	0.98	4.45
6	FNWE24PPU	9.02 ± 0.197	8.27 ± 0.197	6.00	0.14	0.98	6.34

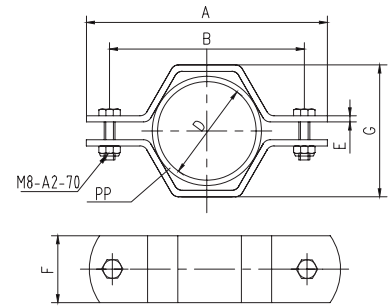

E24C - HEX HANGER W/ VINYL GROMMET COUPLING

Size (in.)	Item #	A (in.)	B (in.)	C ± 0.04 (in.)	D ± 0.12 (in.)	E ± 0.012 (in.)	F ± 0.03 (in.)	G ± 0.12 (in.)
1/2	FNWE24CD	2.93 ± 0.12	2.1 ± 0.12	0.81	0.50	0.14	1.00	1.00
3/4	FNWE24CF	2.93 ± 0.12	2.14 ± 0.12	0.81	0.75	0.14	1.00	1.20
1	FNWE24CG	3.13 ± 0.12	2.32 ± 0.12	0.81	1.00	0.14	0.98	1.48
1-1/2	FNWE24CJ	3.68 ± 0.12	2.89 ± 0.12	0.81	1.50	0.14	0.98	2.01
2	FNWE24CK	4.25 ± 0.12	3.46 ± 0.12	0.81	2.00	0.14	0.98	2.50
2-1/2	FNWE24CL	4.80 ± 0.197	4.05 ± 0.197	0.81	2.50	0.14	0.98	2.95
3	FNWE24CM	5.51 ± 0.197	4.70 ± 0.197	0.81	3.00	0.14	0.98	3.50
4	FNWE24CP	6.75 ± 0.197	5.94 ± 0.197	0.81	4.00	0.14	0.98	4.45
6	FNWE24CU	9.02 ± 0.197	8.27 ± 0.197	0.81	6.00	0.14	0.98	6.34

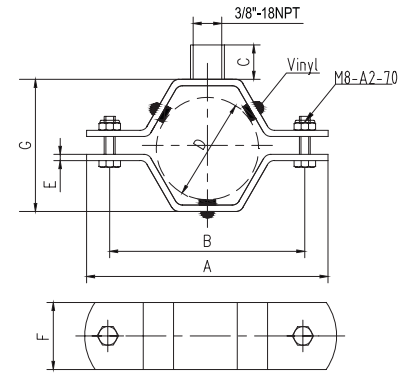

SPECIFICATIONS


FIGURE E24PP - E24C - E24
SANITARY STAINLESS FITTINGS



304 STAINLESS STEEL HEX HANGER

E24 - HEX HANGER W/ VINYL GROMMET

Size (in.)	Item #	A (in.)	B (in.)	D ± 0.12 (in.)	E ± 0.012 (in.)	F ± 0.03 (in.)	G ± 0.12 (in.)
1/2	FNWE24D	2.93 ± 0.12	2.1 ± 0.12	0.50	0.14	1.00	1.00
3/4	FNWE24F	2.93 ± 0.12	2.14 ± 0.12	0.75	0.14	1.00	1.20
1	FNWE24G	3.13 ± 0.12	2.32 ± 0.12	1.00	0.14	0.98	1.48
1-1/2	FNWE24J	3.68 ± 0.12	2.89 ± 0.12	1.50	0.14	0.98	2.01
2	FNWE24K	4.25 ± 0.12	3.46 ± 0.12	2.00	0.14	0.98	2.50
2-1/2	FNWE24L	4.80 ± 0.197	4.05 ± 0.197	2.50	0.14	0.98	2.95
3	FNWE24M	5.51 ± 0.197	4.70 ± 0.197	3.00	0.14	0.98	3.50
4	FNWE24P	6.75 ± 0.197	5.94 ± 0.197	4.00	0.14	0.98	4.45
6	FNWE24U	9.02 ± 0.197	8.27 ± 0.197	6.00	0.14	0.98	6.34

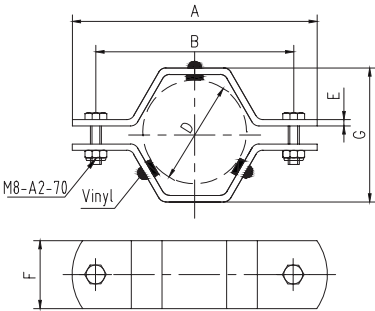

Our Automated Valve Configurator takes care of the sizing for you and generates a CAD file and dimensional data sheet of the complete assembly. Visit fnw.com to check out this free online tool.