

Archer®

68" VibrAcoustic® Bath K-2595-VB



Features

- Two-piece design.
- End drain.
- Slotted overflow for maximum bathing depth
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- High-resolution color screen in polished chrome.
- 67-3/4" (1568 mm) x 31-3/4" (806mm) x 22" (559 mm)

Material

Acrylic

Installation

Freestanding

Required Accessories

K- 7271 Brass Slotted Overflow Bath Drain

K-7272 PVC Slotted Overflow Bath Drain

Components

Additional included component/s: 25' (7.6 m) cables.



Codes/Standards

CSA B45.5/IAPMO Z124 UL 1795 CSA C22.2 No. 218.2 Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Descriptio
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar






Archer®

68" VibrAcoustic® Bath

K-2595-VB

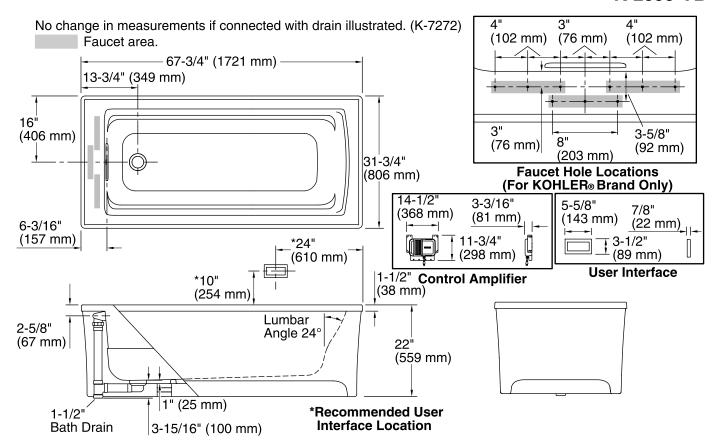

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Amplifier: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal. Installation: Freestanding

Drain location: End

Basin area, bottom: 51-1/16" x 19-11/16" (1297 mm x 500 mm) Basin area, top: 58-9/16" x 25-5/16" (1487 mm x 643 mm)

Weight: 91 lbs (41.3 kg)

Minimum floor load: 43.6 lbs/ft² (212.9 kg/m²)
Water depth: 15-1/16" (383 mm)
Water capacity: 65 gal (246.1 L)

Template: Footprint, 1265461, not required, not

included

Electrical component Amplifier: 120 V, 15 A, 60 Hz, 15 W

rating:

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Control amplifier fits 16" (406 mm) center studs.

Provide a separate grounded outlet if connecting to a powered wireless device or adapter.

