



XR3 TEE Fitting,
XR3T-X-X

Gastite Division
1116 Vaughn Drive
Portland, TN. 37148
Telephone 800-662-0208
www.gastite.com

Description (Sample Specification Language)

FlashShield™ is metallically shielded corrugated stainless steel tubing system complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICC and IAPMO. The FlashShield system is also listed to protective jacket standards, ICC-ES PMG LC1024, and LC1027. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing. The Jacket-Lock™ and Metal locking features provide steel tubing protection and continuous conductivity

Features:

- Tee Body, (3) Split Bushings, (3) Nuts
- Approved for Concealed Use
- Tool-Less Flare Fitting Design
- Metal-to-Metal Seal
- Multi-Point Seal
- Self-Guiding Fitting Assembly
- Jacket-Lock™ Feature
- Metal Locking Feature
- Fully Reusable Fitting




Applicable Standards & Listings:

- CSA: Certificate No. 2728525
- ICC-ES: Report No. PMG 1019, 1066 and 1155
- IAPMO: File No. C-3250

Technical Data:

General

| | |
|----------------------------------|----------------|
| Max. Approved Operating Pressure | 25 psi |
| Operating Temperature Range | -40°F to 160°F |
| Fitting Material | CA360 |

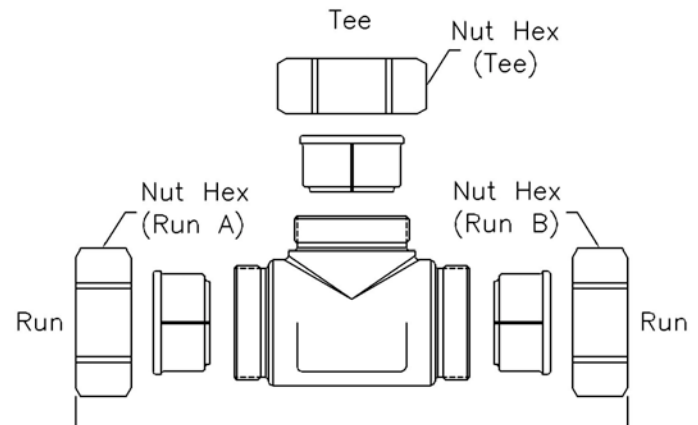

Dimensional Characteristics

| P/N | Run A | | Run B | | Tee | | Assembled Length | Weight (lbs) |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|------------------|--------------|
| XR3T-8 | 1/2" CSST | 1-1/4 Hex | 1/2" CSST | 1-1/4 Hex | 1/2" CSST | 1-1/4 Hex | 2.73" | 0.866 |
| XR3T-11 | 3/4" CSST | 1-1/2 Hex | 3/4" CSST | 1-1/2 Hex | 3/4" CSST | 1-1/2 Hex | 3.22" | 1.348 |
| XR3T-16 | 1" CSST | 1-7/8 Hex | 1" CSST | 1-7/8 Hex | 1" CSST | 1-7/8 Hex | 3.65" | 2.157 |
| XR3T-11-8-8 | 3/4" CSST | 1-1/2 Hex | 1/2" CSST | 1-1/4 Hex | 1/2" CSST | 1-1/4 Hex | 2.85" | 1.160 |
| XR3T-11-11-8 | 3/4" CSST | 1-1/2 Hex | 3/4" CSST | 1-1/2 Hex | 1/2" CSST | 1-1/4 Hex | 3.22" | 1.204 |
| XR3T-16-11-8 | 1" CSST | 1-7/8 Hex | 3/4" CSST | 1-1/2 Hex | 1/2" CSST | 1-1/4 Hex | 3.37" | 1.711 |
| XR3T-16-11-11 | 1" CSST | 1-7/8 Hex | 3/4" CSST | 1-1/2 Hex | 3/4" CSST | 1-1/2 Hex | 3.37" | 1.911 |
| XR3T-16-16-8 | 1" CSST | 1-7/8 Hex | 1" CSST | 1-7/8 Hex | 1/2" CSST | 1-1/4 Hex | 3.65" | 1.690 |
| XR3T-16-16-11 | 1" CSST | 1-7/8 Hex | 1" CSST | 1-7/8 Hex | 3/4" CSST | 1-1/2 Hex | 3.65" | 1.914 |