

TRENCH TOUGH PLUS™

MOLDED PVC FITTINGS

TRENCH TOUGH PLUS™

SDR35 GASKETED SEWER FITTINGS

- Ideal for use in wastewater, stormwater and industrial waste applications.
- Reinforced to SDR26 thickness at key locations such as the branches of tees and wyes for optimal long-term performance.
- Joint withstands 15 psi hydrostatic pressure and a -10.8 psi vacuum pressure.
- Leak-proof at 5° joint deflection and 5% ring deflection.

Injection
Molded
4" – 18"

Fabricated
18" – 42"



NEW MOLDED GASKETED SDR35 SEWER FITTINGS

Product	Size (inches)	Size (mm)	Old Part #	NEW Part #
45° WYE (GxGxG)	15 x 10	375 x 250	043317	143317
	15 x 12	375 x 300	043318	143318
	15	375	043310	143310
	18 x 4	450 x 100	043904	143904
	18 x 6	450 x 150	043903	143903
45° ELBOW (GxG)	15	375	043515	143515
45° ELBOW (SxG)	15	375	043951	143951
REPAIR COUPLING WITHOUT PIPE STOP (GxG)	12	300	043631	143631
EXTENDED BUSHING (SxG) - Concentric	12 x 4	300 x 100	043697	143697
	12 x 6	300 x 150	043617	143617
	12 x 8	300 x 200	043616	143616
	12 x 10	300 x 250	043623	143623
INCREASER COUPLING (GxG)	12 x 4	300 x 100	043798	143798
	12 x 6	300 x 150	043530	143530
	12 x 8	300 x 200	043532	143532
	12 x 10	300 x 250	043520	143520




MULTI FITTINGS


LAYING LENGTH

ISSUE DATE: OCT 30/17
SUPERCEDES: MAR 11/05

45 ° WYE (GxGxG)

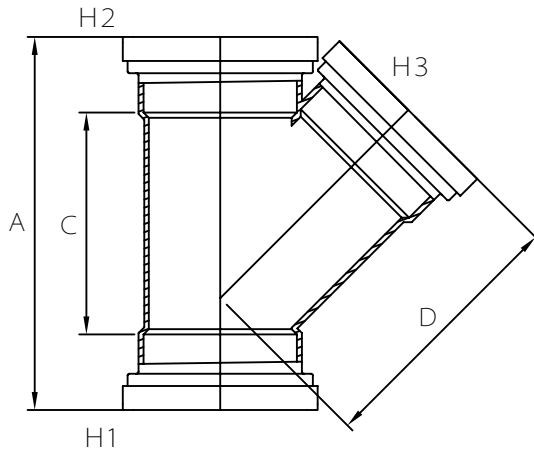

INJECTION MOLDED FITTING (M)

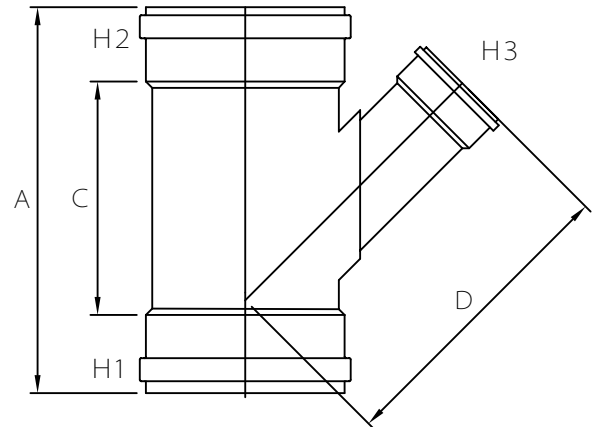

FABRICATED FITTING (F)

	SIZE H1xH2xH3	PART NUMBER	A REF	C REF	D REF
<>M=	18x18x4	143903	21.625	10.500	21.125
M=	18x18x6	143904	21.625	10.500	17.875
F @	18x18x8	043902	40.000	17.500	25.000
F @	18x18x10	043362	43.000	20.500	30.000
F @	18x18x12	043363	48.000	25.500	31.000
++F @	18x18x15	043901	58.000	35.500	36.000
++F @	18x18x18	043900	62.000	39.500	41.000
F @	21x21x4	043899	40.000	14.800	23.000
F @	21x21x6	043898	48.000	22.800	26.250
F @	21x21x8	043897	48.000	22.800	26.000
F @	21x21x10	043896	48.000	22.800	30.000
F @	21x21x12	043895	60.000	34.800	30.000
++F @	21x21x15	043894	68.000	42.800	37.000
++F @	21x21x18	043893	68.000	42.800	48.000
++F @	21x21x21	043467	68.000	42.800	46.000

Note: = Refer to Page G4 for Hub Detail, Type A

@ Refer to Page G5 for Hub Detail, Fabricated

++ FRP Reinforced

<> 4" Deep hub