



Nitrile

## An unparalleled combination of chemical splash protection, comfort and durability

- The world's leading disposable glove for chemical splash protection
- Made with TNT Chemical Splash Resistance Technology for superior protection against harmful chemical splashes
- Super soft nitrile provides a comfortable, silky feel for extended wear
- Proprietary formulation provides robust durability in a softer glove
- Silicone-free design is paint and finish process friendly




### Industries

- Life Sciences
- Food Processing
- Automotive
- Machinery and Equipment
- Chemical
- Agriculture
- Utilities
- Warehousing

### Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Meat, Fish and Food Processing
- Industrial Production
- Maintenance
- Laboratory analysis
- Chemical Handling

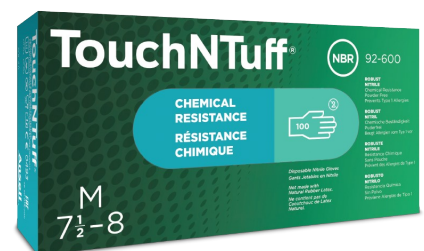

## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

	92-600
Material	Nitrile
Color	Green
Glove Design	Powder-Free, Chlorinated, Silicone Free, Smooth
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory	Category III, EAC TP TC 019:2011, EN 374:2003, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN ISO 374-5:2016, FDA21 CFR 177-2600-US Food Contact Approved, Food Type: Rubber, ISO 9001
Packaging	Bulk Pack: 100 gloves per dispenser; 10 dispensers/1000 gloves per case Vending Pack: 20 gloves per dispenser; 24 dispensers/480 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia, Sri Lanka, Thailand
User Needs Segment	Robust
Available sizes	S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
Anti-static	Yes

### PHYSICAL PROPERTIES

	Typical Values	Testing Method
Length (mm/inches)	240 / 9.5	ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	4.0 AQL (North & South America) / 1.5 AQL (Europe, Middle East, Africa, Asia, Pacific)	ASTM D5151, EN 455-1
Palm Thickness (mm/mils)	0.125 / 4.9	ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.14 / 5.5	ASTM D3767, EN 420
<b>BEFORE AGING</b>		
Ultimate Tensile Strength (MPa)	≥ 18	ASTM D412 & D573
Elongation at Break (%)	≥ 500	ASTM D412
Force at break (N)	≥ 6	EN 455-2
<b>AFTER AGING</b>		
Ultimate Tensile Strength (MPa)	≥ 18	ASTM D412 & D573
Elongation at Break (%)	≥ 400	ASTM D412
Force at break (N)	≥ 6	EN 455-2


### ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	585834	585835	585836	585837
Vending Pack Catalog №	9260000S	9260000M	9260000L	9260000XL

### Technology



### Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

#### Asia Pacific Region

Ansell Global Trading Center  
(Malaysia) Sdn Bhd  
T: +603 8310 6688  
F: +603 8310 6699

#### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

#### Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

#### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

#### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.