

INSTALL INSULATION | IN A SNAP

Product breakthrough makes life easier for HVAC Contractors

Gripnail's new SnapStik Insulation Hangers install fast because workers can grab 5 at a time and just snap them free as they are needed. SnapStik fasteners are also safer to use because they prevent hand injuries caused by sharp spindle points and base plate corners.

SnapStik Insulation Hangers also have a unique Easy-Peel adhesive backing design so that there isn't any fumbling with the release paper. Every SnapStik is neatly packed for quick access and they take up about a third less storage space than loose packed hangers. Prevent hand injuries and speed up your operation with Gripnail's SnapStik Insulation Hangers.




Grab 5 insulation hangers at a time and just snap them free as they are needed.




Easy - Peel Adhesive backing with overlapping paper edge.


How SNAPSTIK Insulation Hangers Work



1 Stick to a clean surface with self-stick pad

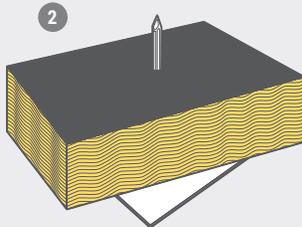

2 Impale any type blanket or board insulation

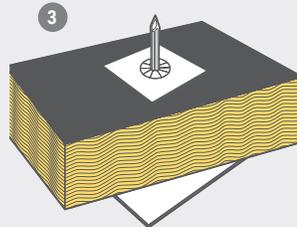


3 Secure with a self locking washer, included with Insulation Hangers



(800) 474-7624
www.gripnail.com

Self-stick Insulation Hanger *with washers*

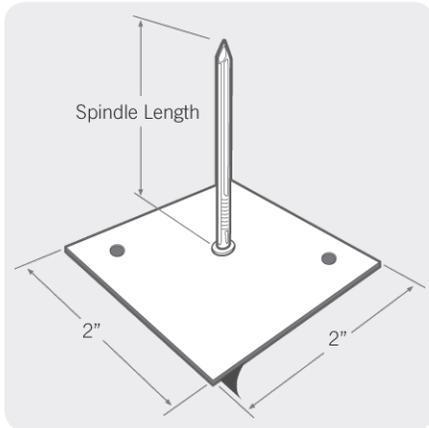

Part No.	Spindle Length
820	3/4"
821	1 1/4"
822	1 5/8"
823	2"
824	2 1/2"

Other sizes available

- Fasteners and self-locking washers are manufactured from low carbon galvanized steel.
- All spindles are 12 gauge. Other spindle lengths, gauges and materials are available upon request.
- Part Number 820 is packaged 200 pieces per box and 10 boxes per master carton. 200 washers/box.
- Part Numbers 821, 822, 823 and 824 are packaged 100 pieces per box and 10 boxes per master carton. 100 washers/box.
- Washers measure 1 1/4" X 1 1/8".
- Load per anchor should not exceed 3 lbs.
- Operating temperatures should not exceed 150 °F.
- Application temperature should exceed 40 °F.
- Shelf life is estimated at 2 years if hangers are stored at room temperature and at 50% relative humidity.

Application Instructions

1. The SnapStik Insulation Hanger will only stick to a clean, dry, smooth surface. Remove any oil, rust, loose paint, etc. before applying the fastener. Cleaning the surface is recommended.
2. Peel off the backing paper. Notice that the Easy-Peel backing paper purposely overhangs the adhesive so that the paper is easy to grasp.
3. Firmly press the fastener against the cleaned surface.
4. Impale the insulation over the point of the fastener.
5. Secure the insulation with the self locking washers.
6. Bend or remove remaining point.

Safety

SnapStik Insulation Hangers - Just Click it and Stick it



Safer to use - no reaching into a box of sharp points and corners



More compact storage - 1/3 less space than conventional packaging



ISO 9001:2008 Registered
Made in the U.S.A.
An employee owned company

97 Dexter Road, East Providence, RI 02914
Email: gripnail@gripnail.com
(800) 474-7624 Fax: (401) 438-8520

