

CAVATA_{TM}

Features

- Vitreous china
- Elongated bowl
- Class Five flushing system
- Includes seat, cover, wax ring, polished chrome trip lever and floor hardware
- Less supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 11-1/4" (286 mm) x 8-1/4" (210 mm) water area
- 29-1/2" (749 mm) x 19-3/4" (502 mm) x 28-1/2" (724 mm)


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- EPA WaterSense_®

THE COMPLETE SOLUTION TOILET K-12698





Colors/Finishes

0: White

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model K-12698	Description The Complete Solution toilet	Trip Lever left-hand	Colors/Finishes		
Recommended Accessories K-7637 Angle supply with stop – 3/8" NPT					

Product Specification

The elongated bowl toilet shall be made of vitreous china. Product shall be 29-1/2'' (749 mm) in length, 19-3/4'' (502 mm) in width, and 28-1/2'' (724 mm) in height with a 11-1/4'' (286 mm) x 8-1/4'' (210 mm) water area. Product shall be for 12'' (305 mm) rough-in. Product shall feature a 1.28 gpf (4.8 lpf) and Class Five_® flushing system. Product shall include a bowl, tank, toilet seat, wax ring, and floor hardware. Product shall include a polished chrome trip lever. Product shall be less supply. Product shall have a 2-1/8" (54 mm) glazed trapway. Toilet shall be Kohler Model K-12698-

CAVATA_{TM}


Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-1/4" (286 mm) x 8-1/4" (210 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:			
Bowl	K-4198		
Tank	K-4835		
Tank cover	1145294		
Trip lever	1148055		
Toilet seat	K-4636		
Bolt cap accessory pack	1013092		
Wax ring and hardware installation kit	1023457		

Installation Notes

Install this product according to the installation guide.

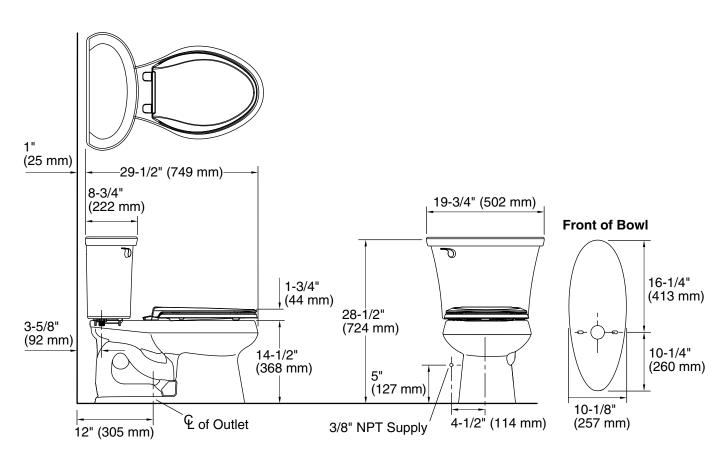

Product Diagram

