



# SUBMITTAL INFORMATION

## Iron Service Saddles - (FC202-xxx-TAP style)



### FC202 EPOXY COATED DOUBLE BAND IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

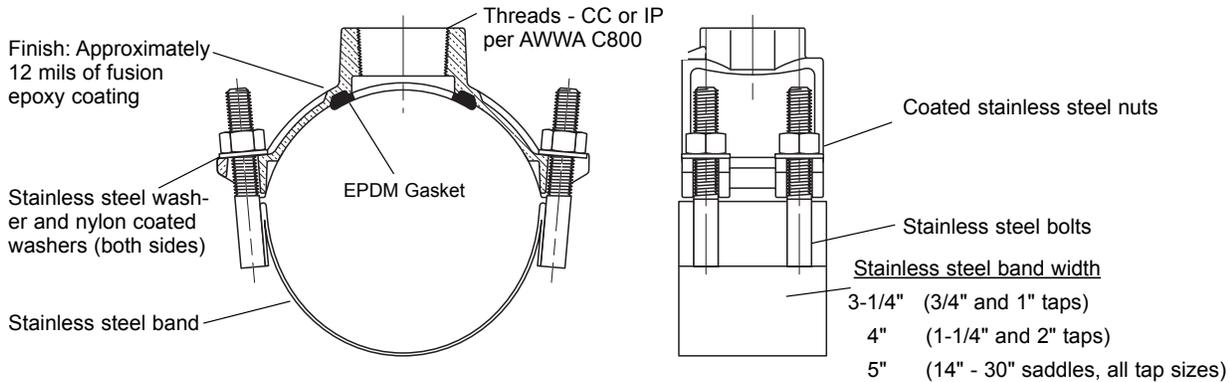

NOM. PIPE SIZE	O.D. RANGE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	*2.35 - 2.50	2.8	FC202-250-TAP	
2-1/2"	*2.75 - 2.90	2.8	FC202-290-TAP	
3"	**3.80	4.8	FC202-380-TAP	
	**3.80 - 4.25	5.5	FC202-425-TAP	
4"	**4.26 - 4.73	5.4	FC202-473-TAP	
	***4.50 - 4.80	5.4	FC202-480-TAP	
	▲ 4.74 - 5.00	5.4	FC202-500-TAP	
	**4.74 - 5.26	5.4	FC202-526-TAP	
	▲ 4.97 - 5.26	5.4	FC202-526-TAP	
6"	5.94 - 6.69	5.7	FC202-669-TAP	
	6.63 - 6.90	5.7	FC202-690-TAP	
	6.84 - 7.60	6.7	FC202-760-TAP	
8"	7.93 - 8.71	6.8	FC202-871-TAP	
	8.63 - 9.05	8.2	FC202-905-TAP	
	8.99 - 9.79	8.4	FC202-979-TAP	
10"	10.00 - 10.75	9.4	FC202-1075-TAP	
	10.75 - 11.10	9.0	FC202-1110-TAP	
	11.10 - 12.12	10.8	FC202-1212-TAP	
12"	12.00 - 12.75	11.0	FC202-1275-TAP	
	***12.75 - 13.20	9.0	FC202-1320-TAP	
14"	13.20 - 14.38	12.8	FC202-1438-TAP	
	15.30 - 16.25	11.9	FC202-1625-TAP	
	16.30 - 17.25	12.9	FC202-1725-TAP	
16"	17.40 - 18.40	13.1	FC202-1840-TAP	
	18.50 - 19.25	12.3	FC202-1925-TAP	
18"	19.50 - 20.50	13.1	FC202-2050-TAP	
20"	21.20 - 22.20	13.2	FC202-2220-TAP	
	22.50 - 23.50	13.3	FC202-2350-TAP	
24"	23.80 - 24.80	13.4	FC202-2480-TAP	
	25.60 - 26.50	13.9	FC202-2650-TAP	
30"	31.74 - 32.74	14.8	FC202-3274-TAP	

- \* Saddles for this pipe range are available with 3/4" and 1" taps only.
- \*\* Saddles with this pipe range are not available with 2" CC or 2-1/2" IP taps.
- \*\*\* These saddles with 1-1/4" - 2-1/2" taps fit the top of the listed range only. Example: FC202-1320-CC7 fits 13.20 pipe O.D. only.
- ▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) taps.

OUTLET TAP CODE		
CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	
IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

### FEATURES

- Body made of high strength ductile iron per ASTM A536
- Double wide band and 5/8" UNC threaded bolts of 18-8 type 304 stainless steel 1/2" bolts are furnished on saddles 3" and smaller
- Gasket is EPDM rubber, ASTM D2000
- Finish on saddle body is fusion epoxy coat approximately 12 mils thick
- UL Classified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
 www.fordmeterbox.com

11/04/14



36 Hudson Rd  
 Sudbury MA 01776



800-225-4616  
 www.tisales.com