



DESIGN FEATURES

- Valve available in ABS & PVC
- Rated at 20 DFU for venting 1 1/2" and 2" DWV
- Tested to work effectively in temperatures ranging from -40 to 150 degrees Fahrenheit
- Valves open at -0.01 psi and seal at 0 psi and above
- AAVs offered with adapters in 3 different sizes to handle all applications; Junior, Senior and US90 3"
- Wall Boxes and Louvers offers a recessed clean look for AAVs in visible locations

COMPLIANCES/LISTINGS

- Listed to ASSE 1050/1051 (except Durgo Jr.) through ASSE International
- ANSI/NSF 14 Compliant



3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail customerservice@lspproducts.com

Website www.lspproducts.com


Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

Rev 8/17

AIR ADMITTANCE VALVES (AAV)

Specification Sheet

Part Number	Description
P-3700	Durgo Senior 1 1/2" - 2" w/ White ABS Adapter (20 DFU)
P-3701	Durgo Senior 1 1/2" - 2" w/ PVC Adapter (20 DFU)
P-3702	Durgo Junior 1 1/2" - 2" w/ White ABS Adapter (20 DFU)
P-3703	Durgo Junior 1 1/2" - 2" w/ PVC Adapter (20 DFU)
P-3704	Durgo US90 3"
OBAV-200	AAV Wall Box w/ Louver Faceplate
OBAV-3702	AAV Wall Box w/ Louver Faceplate & Durgo Junior 1 1/2" - 2" w/ White Adapter
OBAV-3703	AAV Wall Box w/Louver Faceplate & Durgo Junior 1 1/2" - 2" w/PVC Adapter
Accessories/Replacement Parts	
P-00961	White AAV Wall Box Louver Faceplate
P-3705	1 1/2 " White ABS Adapter
P-3706	1 1/2" PVC Adapter

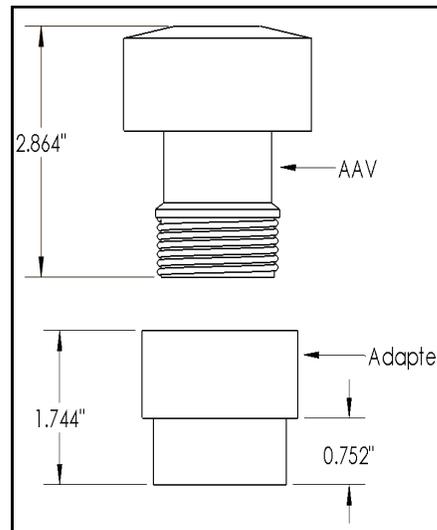

Product Submittal	
Job Name:	
Date:	
Part Number	Quantity
Architect:	
Contractor:	