

## TrueDEK® Classic Drain

ARC, Inc.  
1-877-319-6521  
info@arcfirst.net

### Item Code and Description

- a. CD1210-BS (AKW item code: 25402)
- b. TrueDEK Classic Drain in brushed stainless steel

### General Product Description

- a. drain assembly for tiled showers
- b. fits TrueDEK Classic shower foundations
- c. includes drain assembly, drain connector, and drain gasket

### Physical Characteristics

- a. grate and frame made of SAE grade 304 stainless steel
- b. adaptor, clamping ring, lock key, and height adjustment collar made of ABS plastic
- c. all hardware for installation is stainless steel (included)
- d. includes a leverage key to remove grate
- e. weep holes in height adjustment collar
- f. taller height adjustment collar available (to match thicker tile)
- g. drain gasket made of nonwoven polyester
- h. drain gasket dimensions: 13" × 13" with pre-punched 5½" dia. hole
- i. drain gasket thickness: approximately .65mm
- j. drain gasket color: white
- k. printed surface of drain gasket indicates "this side up"
- l. shower drain connector made of PVC (Sioux Chief model 825)

### Performance Characteristics

- a. adjust elevation of grate and frame to match tile from ¼" to ⅝" thick
- b. taller height adjustment collar accommodates tile up to 1" thick
- c. weep holes provide secondary drainage
- d. drain connector clamps to bottom flange of adaptor
- e. solvent weld drain connector to 2" dia. drain line
- f. suitable for a maximum water flow rate of 6 to 7 gallons/minute; consult a professional plumber for an accurate calculation of drainage requirements; a typical shower head uses 1.5 to 2.5 gallons/minute
- g. clamping ring engages drain gasket to complete a mechanical waterproofing connection that covers drain assembly joints outside of actual drain channel
- h. embed drain gasket to drain adaptor and shower foundation for a waterproof seal

### Compliance

- a. ICC PMG-1222 lists compliance with:
  - 1. 2015, 2012 and 2009 International Residential Code® (IRC)
  - 2. 2015, 2012 and 2009 International Plumbing Code® (IPC)
  - 3. 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
  - 4. 2010 and 2005 National Plumbing Code of Canada (NPC)
  - 5. ASME A112.18.2/CSA B125.2-2011, Plumbing Waste Fittings




### Other Information

- a. AKW limited lifetime warranty on drain assembly
- b. Sioux Chief limited lifetime warranty on drain connector

# TrueDEK® Classic Drain

ARC, Inc.  
1-877-319-6521  
info@arcfirst.net

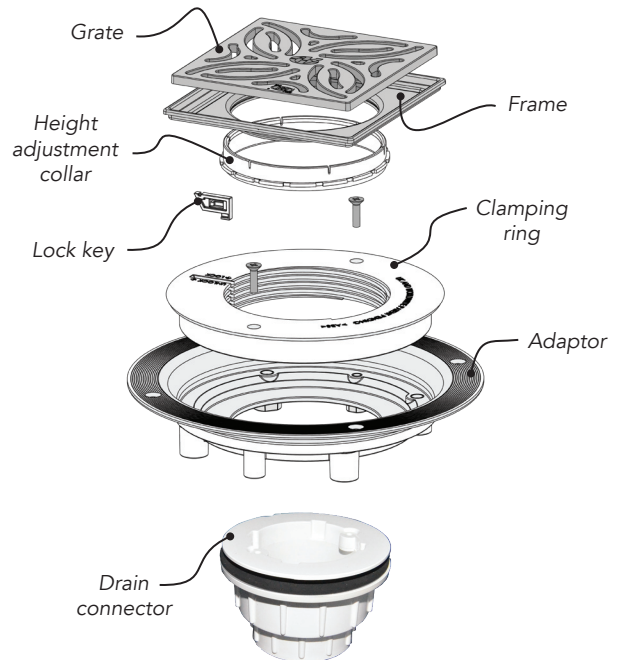

For drain connector  
specifications, please  
see item code  
DC5500-PVC.

Drain gasket



Embedding  
gasket over drain.



Grate installed  
in clamping ring.



Underside of shower foundation  
with drain installed.

