


WC12HP 1/2 HP

FOOD WASTE DISPOSER

WC12HPWC 1/2 HP WITH POWER CORD FOOD WASTE DISPOSER

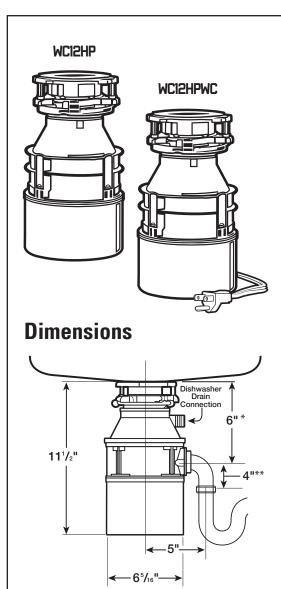

 Distance from bottom of sink to center line of disposer outlet. Add 1/2" when stainless steel sinks are used.
** Length of tailpipe from center line of disposer outlet to end of tailpipe. NOTE: Plumb waste line to prevent standing water in disposer motor housing.

Job Specifications

Submittal Sheet

- 1-year limited warranty (over-the-counter)*
- Plastic grind chamber
- Galvanized steel grinding elements with two stainless steel 360° swivel lugs
- Stainless steel sink flange with positive seal 1-piece plastic stopper
- Overload protector manual reset
- Permanently lubricated upper and lower bearings
- Quick Lock[®] mounting for fast, easy installation
- Exclusive cushioned anti-splash baffle
- Dishwasher drain connection

• Westcraft WC12HPWC includes: Factory installed power cord

Sample Specification

Food Waste Disposer(s) shall be Westcraft WC12HP, continuous feed, with 1/2 H.P. motor, galvanized steel grinding elements with two stainless steel 360° swivel lugs.

Westcraft WC12HPWC includes: Factory installed 3' power cord.

1-Year Limited Over-The-Counter Warranty

* The complete Westcraft warranty is included in the Care & Use Booklet packed with each unit.

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	1/2
Volts	120
HZ	60
RPM	1725
Amp. (Avg. Load)	6.3
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	WC12HP: 13 lbs. 10 oz. WC12HPWC:13 lbs. 14 oz.
Unit Finish	Black
Overall Height	11-1/2″
Grind Chamber Capacity	26 oz.
Motor Protection	Manual Reset Overload
Average Water Usage	Approx. 1 Gallon per Person Per Day
Average Electrical Usage	3-4 KWH per Year
Drain Connection	1-1/2" Cushioned Slip Joint
Dishwasher Drain Connection	Yes
Factory Installed Power Cord	WC12HP: No WC12HPWC: Yes

