PKD7000BN/FN/SN

GE Profile[™] Series 27" Built-In Double Electric Convection Wall Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

NOTE: Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200° F (94° C).

NOTE: If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

NOTE: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.

8-3/4" MAX.	25" MIN. 25-1/4" MAX.	
Cutout depth 23-1/2" MIN		
Junction box location	Ä	
Conduit 48"		Cutout height
44" to bottom of junction box		49-11/16" MIN. 50-1/8" MAX.
	c	
22"		
23" minimum	27"	Recommended minimum
door opening allowance		cutout location from the floor 13-1/4"
Dimension and installation information are al		

Dimension and installation information are shown in inches.

KW RATING		
240V	8.4	
208V	6.3	
BREAKER SIZE		
240V	30 Amps	
208V	30 Amps	



Cabinet	27"
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	1"
C - Overlap of oven at bottom of cutout	1"
Oven	
D - Install depth	23-1/2"
E - Overall height with trim	51-1/8"
F - Overall width	26-3/4"

Cutout width









PKD7000



For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

PKD7000BN/FN/SN

GE Profile[™] Series 27" Built-In Double Electric Convection Wall Oven

FEATURES AND BENEFITS

Brilliant Touch 7" Display – A bright, interactive touch screen makes it fun and easy to program the oven

True European Convection – Achieve delicious results from a third heating element and fan combination

Anywhere control with remote notification – Save time by be preheating and controlling your oven from anywhere using the GE Appliances Kitchen app

Never scrub, smooth glide racks – Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven

Precision temperature probe – Internal probe allows monitoring of roasts and meats to assure they are thoroughly and accurately cooked without opening the oven door

Never scrub racks – Save time and effort with racks that are specially engineered to withstand the heat of the self-clean cycle

10-pass hidden bake element – Even baking and quick cleanup are assured, with a 10-pass element that heats a large cooking area and is hidden for an easy-to-wipe surface


 $8\mbox{-pass}$ broil element – Get full broil coverage and even browning from edge to edge

Scan-to-cook – Prepare your favorite packaged foods to perfection simply by scanning the barcode on the package with your smartphone and letting your oven adjust settings automatically

Model PKD7000BNTS - Black Stainless

Model PKD7000FNDS - Black Slate

Model PKD7000SNSS - Stainless steel

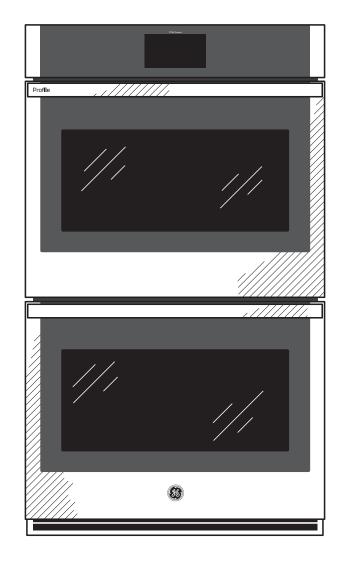

FIT GUARANTEE



Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to \$300 toward modifications.

Visit geappliances.com for more info