



Brella™

Skirted Trapway Two-piece Toilet

402095

Features

- New Product. Need Copy


Recommended Accessories

- K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
- K-7637 Angle Supply with Stop (single)

Components

Product includes:

- 402098 Toilet Tank
- 402101 Elongated Toilet Bowl
- Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.

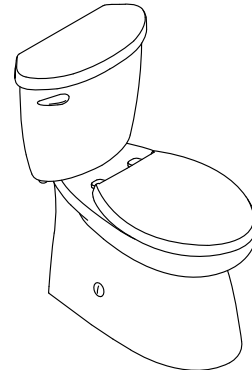

ADA **CSA B651** **OBC**

Codes/Standards

- ASME A112.19.2/CSA B45.1
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC

STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


	0	White
--	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

10-20-2018 08:19 - US

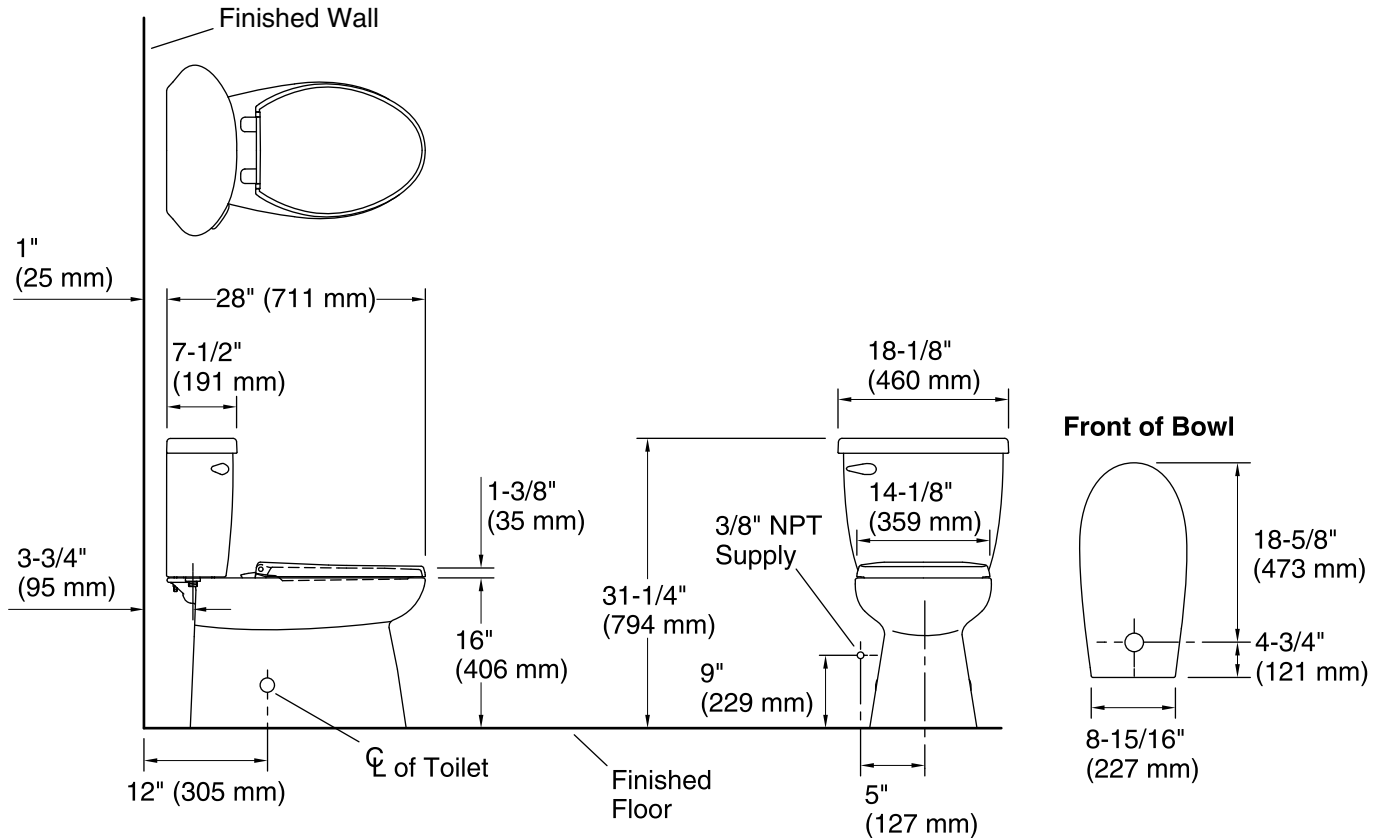

Technical Information

All product dimensions are nominal.

- Toilet type: Two-piece, Floor-mount
- Waste Outlet: Floor
- Flush type: Gravity siphon washdown
- Trap passageway: 2" (51 mm)
- Water Consumption
 - Full: 1.28 gpf (4.8 lpf)
- Water surface size: 5-1/16" x 4-9/16" (129 mm x 115 mm)
- Rim to water surface: 8-9/16" (217 mm)
- Rough-in: 12
- Seat-mounting holes: 5-1/2" (140 mm)

Fixture Supply Requirements

- Min static pressure: 15 psi (103.4 kPa)
- Max static pressure: 80 psi (551.6 kPa)

Notes

- Install this product according to the installation instructions.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
- Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.
- Accessibility standards may require controls to be located on the open side of the toilet.