


48"/36"/30" PRO-STYLE™ WALL-MOUNT HOODS

JXW9046HP – 48" x 19 3/8" x 25"


JXW9036HP – 36" x 19 3/8" x 25"

JXW9030HP – 30" x 19 3/8" x 25"

PRODUCT DIMENSIONS

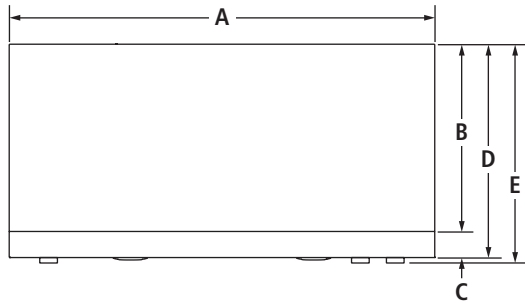


FRONT VIEW

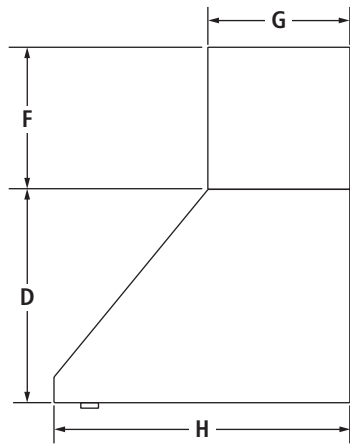

SIDE VIEW

(shown with optional duct cover)

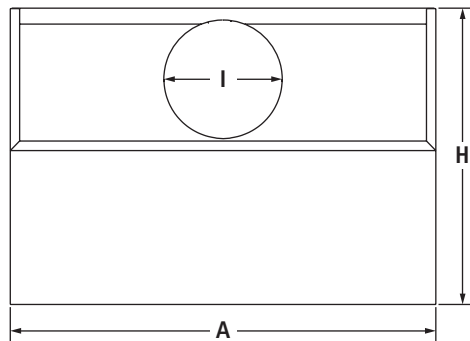

TOP VIEW

MODEL #		JXW9048WP		JXW9036WP		JXW9030WP	
		in	cm	in	cm	in	cm
A	Overall width	48	121.9	36	91.4	30	76.2
B	Height without trim	15 ³ / ₄	40.0	15 ³ / ₄	40.0	15 ³ / ₄	40.0
C	Height of trim	2 ¹ / ₄	5.7	2 ¹ / ₄	5.7	2 ¹ / ₄	5.7
D	Height without controls	18	45.7	18	45.7	18	45.7
E	Height with controls	19 ³ / ₈	49.1	19 ³ / ₈	49.1	19 ³ / ₈	49.1
F	Height of optional duct cover	12	30.5	12	30.5	12	30.5
G	Depth of optional duct cover	12	30.5	12	30.5	12	30.5
H	Depth of hood	25	63.5	25	63.5	25	63.5
I	Vent collar diameter	9 ⁷ / ₈	25.1	9 ⁷ / ₈	25.1	9 ⁷ / ₈	25.1

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


48"/36"/30" PRO-STYLE™ WALL-MOUNT HOODS

JXW9046HP – 48" x 19 3/8" x 25"

JXW9036HP – 36" x 19 3/8" x 25"

JXW9030HP – 30" x 19 3/8" x 25"

OPENING/CLEARANCE DIMENSIONS

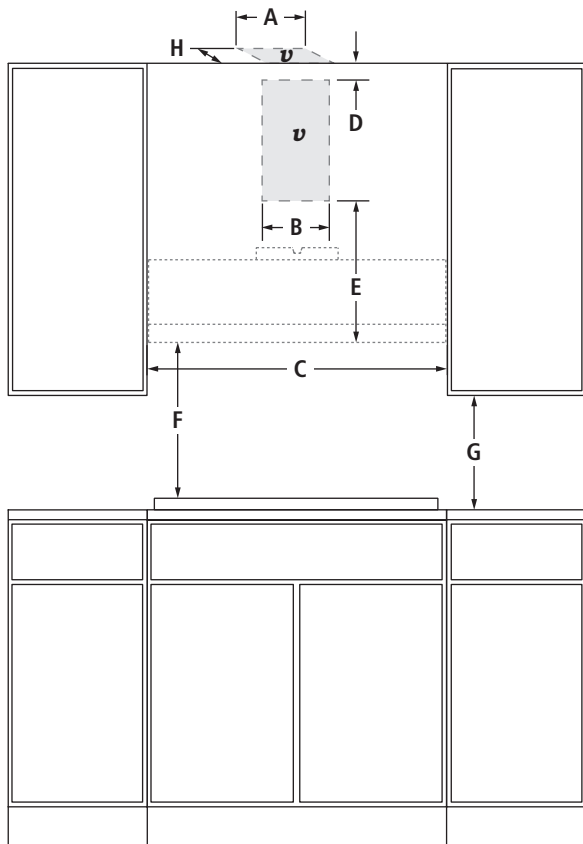

FRONT VIEW

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. The knockout into the back of the terminal box is located on the right side.

VENTING REQUIREMENTS

The hood is factory set for venting through the roof or wall. Do not terminate the vent in an attic or other enclosed area.

LOCATION REQUIREMENTS

The minimum height from the floor to the top of the vent hood is 7' (2.1 m). The minimum height from the floor to the top of the optional duct cover is 8' (2.4 m).

MODEL #		JXW9048WP		JXW9036WP		JXW9030WP	
		in	cm	in	cm	in	cm
A	Width of vent entry location – ceiling option	12	30.5	12	30.5	12	30.5
B	Width of vent entry location – wall option	12	30.5	12	30.5	12	30.5
C	Width of cabinet opening (min.)	48	121.9	36	91.4	30	76.2
D	Height from vent entry location to ceiling – wall option (min.)	2	5.1	2	5.1	2	5.1
E	Height from hood to vent entry location – wall option (min.)	24	61.0	24	61.0	24	61.0
F	Height from hood to cooking surface (min.-max.)	30-36	76.2-91.4	30-36	76.2-91.4	30-36	76.2-91.4
G	Height from upper cabinet to countertop (min.)	18	45.7	18	45.7	18	45.7
H	Depth of vent entry location – ceiling option	12	30.5	12	30.5	12	30.5
v	Recommended vent entry location						

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.