





Submitted Model No.:

Specific Features:

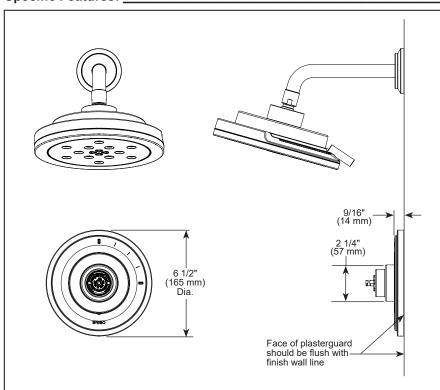









▲ Designate proper finish suffix

BRIZO

PRESSURE BALANCE SHOWER TRIM

▲ Atavis™ Collection

▲ Valve Only (T60P042)

▲ Shower Only (T60P242)

FEATURES:

 \bullet Monitor $^{\! @}$ 14 series pressure balanced bath mixing valve

STANDARD SPECIFICATIONS:

- $\rm H_2Okinetic^{@}$ 4-function showerhead 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice[®] Universal rough valve body [R60000 Series]
- · Back-to-back installation capability
- · Solid brass fabricated body
- Temperature and volume controlled with handle
- Red/Blue temperature indicator markings
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP81665) extends rough installation up to 1 3/4"
- Available collection matching shower arm RP100762▲

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A117.1 - Valve control only

• EPA WaterSense®

Brizo Kitchen & Bath Company

Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2019 Brizo Kitchen & Bath Company