

For Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____


SI-742-L

Sediment & Hair Interceptor

Specification

Watts SI-742-L floor mounted or recessed epoxy coated steel large capacity sediment interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt, removable stainless steel dual chamber basket, and 2"(51) no hub connections. Maximum flow rate 30 GPM.

Note: SI-742-L requires 17"(432) clearance above cover to remove sediment basket.

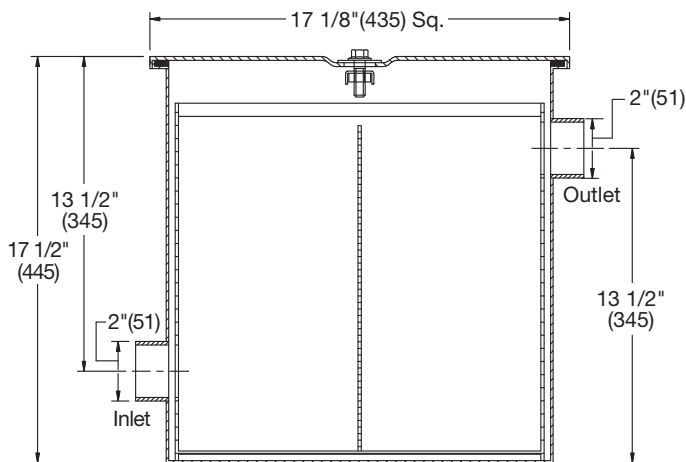

Suffix	Options Description	
-E	Extension	<input type="checkbox"/>
-O	Inlet & Outlet Other Than Standard	<input type="checkbox"/>
-SS	All Stainless Steel	<input type="checkbox"/>
-THD	IPS Threaded Connections	<input type="checkbox"/>

Please refer to watts.com for BAA information on specific models.

Approvals



NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com
Canada: T: (888) 208-8927 • F: (888) 479-2887 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com