


LEVON™ CUSTOM

MAD7912B
Ceiling Fan**

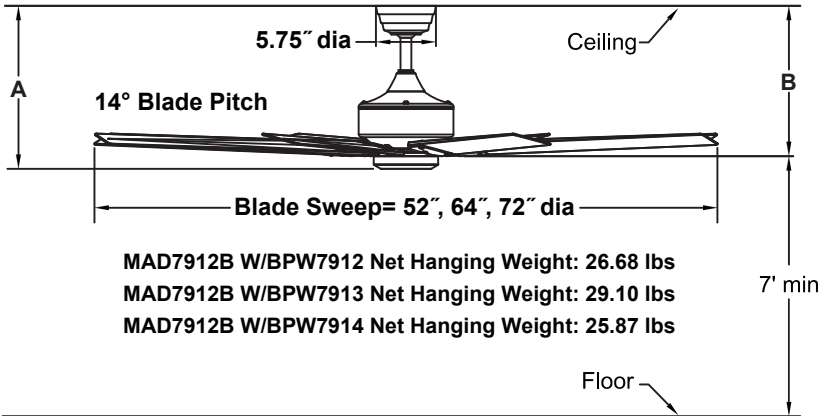

Available Finishes	
BL	Black
BN	Brushed Nickel
DZ	Dark Bronze
GR	Matte Greige
GZ	Galvanized
MW	Matte White

	A	B
Fan w/6" downrod	15.58"	14.40"
Fan w/12" downrod	21.58"	20.40"
Fan w/18" downrod	27.58"	26.40"
Fan w/24" downrod	33.58"	32.40"
Fan w/36" downrod	45.58"	44.40"
Fan w/48" downrod	57.58"	56.40"
Fan w/60" downrod	69.58"	68.40"
Fan w/72" downrod	81.58"	80.40"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-165NM sensorless DC motor is designed for optimal performance with this fan.

BLADES:

8 bladed blade sets are available in plastic and wood materials — all sold separately. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

A WiFi receiver and TR205D hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW206D wall control is available — sold separately. Instructions are provide with each control.

LIGHTING OPTIONS:

LK7912B One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 24" downrod or longer downrod (Measured with BPW7913 Blade). Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.
The 52 inch - 54 inch fans are for rooms up to 400 sq ft.
The 56 inch or larger fans are for room over 400 sq ft.

Airflow / Energy Efficiency Info test with BPW7913 Blade in 72" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	95	8244	270	0.40	31
Med (9 th)	72	6158	445	0.21	14
Low (1 th)	48	4090	784	0.08	5

Energy Guide FTC Measured with BPW7913 Blades in 72" sweep			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	6177	6	291