

## Vector® Shower Head

### MODELS:

- S-6000: 2.5 GPM (9.5 L/min) flow rate
- S-6000-E2: 2.0 GPM (7.6 L/min) flow rate
- S-6000-E175: 1.75 GPM (6.6 L/min) flow rate

### FEATURES:

- 5 plungers, 149 sprays, 4 spray patterns
- Spray adjusting faceplate
- Stainless steel exterior shell, plastic faceplate, and brass ball
- 1/2" -14 NPT female inlet
- Corrosion resistant finishes
- Coordinates with Vector Collection

### STOCK FINISHES:



PC MB

### SPECIALTY FINISHES:



PB PN




### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- CEC (CA Energy Commission) certified, 1.75 GPM only
- WaterSense certified, 2.0 & 1.75 GPM only

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- 1 Year Limited Warranty (commercial)
- Limited Lifetime Warranty (residential)

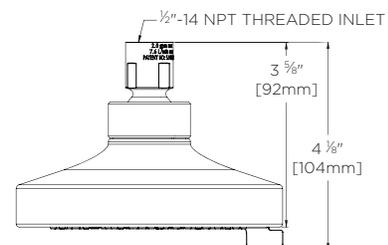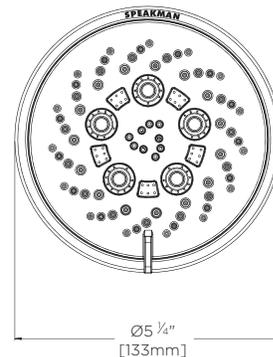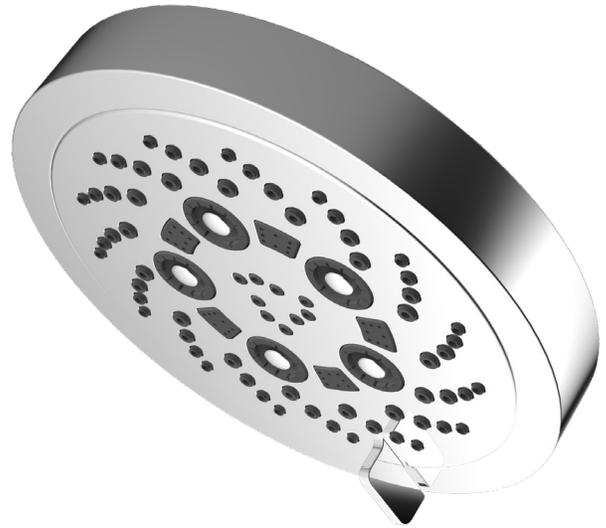

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN  
400 ANCHOR MILL ROAD  
NEW CASTLE, DE 19720

P: 800-537-2107  
F: 800-977-2747  
W: WWW.SPEAKMAN.COM  
R: 02-AUGUST 2018