




# Z1800-12B

## 12" [305] DIAMETER ROUND INDUSTRIAL SANITARY FLOOR DRAIN

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

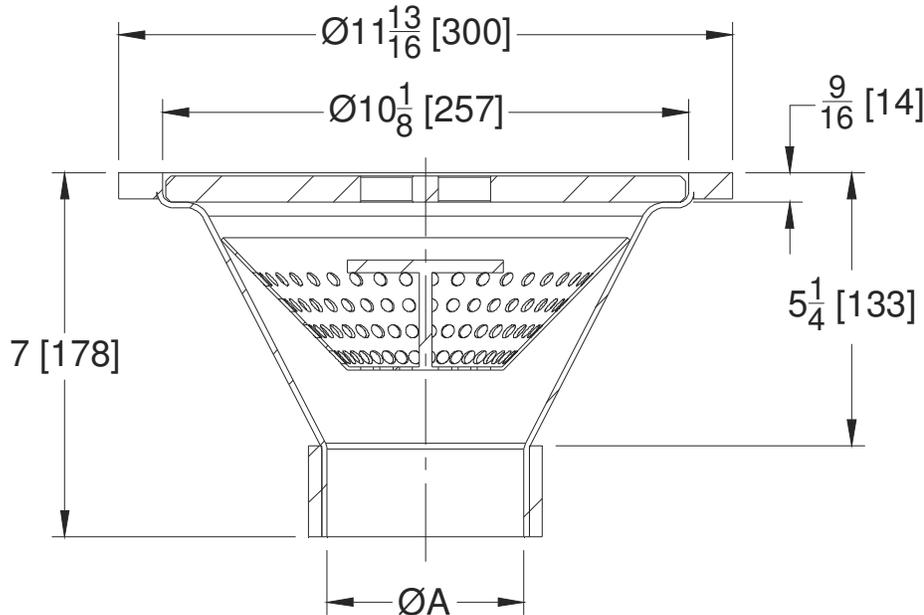

Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
18 [8]	19.2 [124]

### Engineering Specification: Z1800-12B

12" [305] Diameter x 5-1/4 [133] Deep, 12 gauge, type 304 stainless steel, round industrial sanitary floor drain features loose set heavy-duty slotted grate (1/2 [13] thick plate) with finger holes, 9/16 [14] top frame, perforated removable sediment bucket with lift handle, pre-pour stabilizing anchor tabs, and bead blasted finish. Drain meets U.S. FDA standards for corrosion resistance.

### Options (Check/specify appropriate options)

**Pipe Size (ØA)** (Specify size/type) **Outlet**  
 3-4-6[76-102-152] \_\_\_ BW Butt-Weld  
 3-4-6[76-102-152] \_\_\_ NH No-Hub

### Prefixes

\_\_\_ Z Type 304 (CF8) Stainless Steel\*  
 \_\_\_ ZM Type 316 (CF8M) Stainless Steel

### Suffixes

\_\_\_ -A Adjustable Threaded Outlet  
 \_\_\_ -BF Butterfly Lock Sediment Basket  
 \_\_\_ -K Anchor Flange  
 \_\_\_ -KC Anchor Flange w/ Seepage Holes and Clamp Collar  
 \_\_\_ -MG EZLock Magnetic Lock System  
 \_\_\_ -P 1/2 [13] Trap Primer Connection

### Grate Options

\_\_\_ -H3 Heavy-Duty Perimeter Gap - 1/2 [13] Plate (15 sq. In. [97cm<sup>2</sup>] Open Area). Add 1/2 [13] to overall height.  
 \_\_\_ -H5 Heavy-Duty Slotted Grate - 1/2 [13] Plate w/ Finger Holes (19.2 sq. In. [124 cm<sup>2</sup>] Open Area). Add 1/2 [13] to overall height.

\* Regularly furnished unless otherwise specified.