

SPECIFICATIONS

FIGURE 7896
REFRIGERANT LINE SUPPORT





THREADED ROD HANGER SYSTEM

The FNW Threaded Rod Hanger System (TRH) provides a superior fit and finish to better meet contractor and engineer specifications. Supports cable runs on a pair of insulated flow and return refrigerant lines on 1/4" to 3/8" threaded rod. Simply fold the lock-tab over to secure the lines into the strap. The spring steel hanger grips the rod tightly, and the black zinc coating offers corrosion resistance while matching the insulation color. The clamp can be detached from the rod hanger and used to secure lines to flat surfaces.

FEATURES

- Black color to match pipe insulation
- Quick install
- Quick to adjust
- Spring steel hanger grips rod tightly
- Rolled steel edges for safe cable runs
- Sold in packs of 10 (FNW7896S sold as 5-pk)

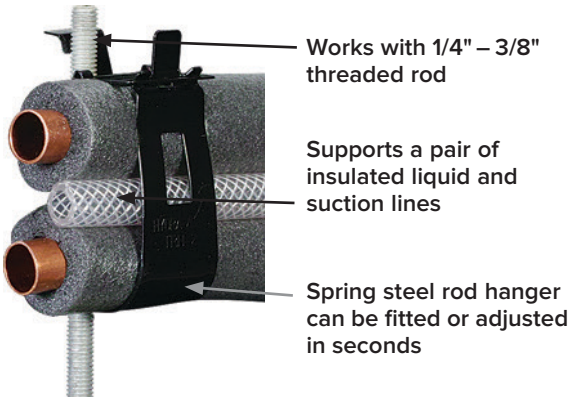

REFERENCE CHART

Item #	Package Quantity	Flow & Return Pipe Pairs (in.)	Threaded Rod Diameter (in.)	A (in.)	B (in.)	C (in.)
FNW7896K	10	3/8 Liquid & 5/8 Gas	1/4 - 3/8	1.28	3.12	3.82
FNW7896M	10	1/2 Liquid & 7/8 Gas	1/4 - 3/8	1.40	3.28	3.70
FNW7896P	10	5/8 Liquid & 1-1/8 Gas	1/4 - 3/8	2.40	4.17	5.00
FNW7896S	5	—	1/4 - 3/8	3.38	6.26	7.03