# **Swivel Sink and Pantry Faucets** B-0233-02


TAG:	

# Double Pantry Faucet

## **Architect/Engineering Specifications:**

8" wall mount mixing faucet with polished chrome plated brass body, 8" swing nozzle with stream regulator outlet and soap dish, compression cartridges with spring checks, lever handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.


Job Name	
Model Specified	Quantity
Variations Specified	
Date	

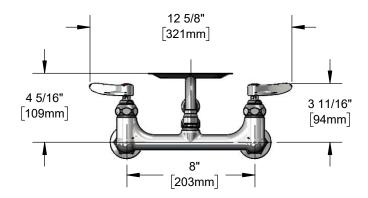

#### Features & Benefits:

- 8" wall mount mixing faucet with polished chrome plated brass body
- 8" swing nozzle w/ soap dish
- Lock washer provided for rigid application
- Stream regulator outlet, Series 2
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Adustable centers from 7 3/4" to 8 1/4"
- Lever handles w/ color coded indexes
- 1/2" NPT female inlets w/ Ø2" flanges
- Material: Polished chrome plated brass body & tubular spout and chrome plated metal handles

N - -- A - -- 4 - -!



# **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)





#### Performance Data:

Pressure: 20 - 125 psi Temperature: 40°F - 140°F

Flow Rate: 16.50 GPM @ 60 psi

**Optional Handles** 



### Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	□ 4" Wrist Action □ Lever (Standard)
0.35	N/A	□ B-0199-02-N035	N/A	□ B-0199-07-N035	□ 4-Arm
0.5	N/A	□ B-0199-02-N05	N/A	□ B-0199-07-N05	
1.0	□ B-0199-02-F10	N/A	□ B-0199-07-F10	N/A	Optional Cartridges With Checks
1.2	□ B-0199-02-F12	N/A	□ B-0199-07-F12	N/A	□ Quarter-Turn Cerama w/ Check Valve
1.5	□ B-0199-02-WS	N/A	□ B-0199-07-WS	N/A	□ Quarter-Turn Eterna w/ Spring Check (Standard)
2.2	□ B-0199-02	N/A	□ B-0199-07	N/A	1 3 - ( ,







