


SUBMITTAL INFORMATION

Adapter Flange (UFA200-S-x series)




UNI-FLANGE SERIES 200 ADAPTER FLANGE FOR STEEL PIPE


Set Screw - AISI 4140 Steel;
Tensile 190,000 psi
minimum. Heat treated to
Rockwell C 35-44, and zinc
plated for corrosion resistance.

Flange - Ductile Iron --ASTM
A536. Grade 65-45-12.
Drilling to ANSI B16.1 (125 lb.
cast iron) or ANSI B16.5
(150 lb. steel)

Color Code: Gray for steel
applications

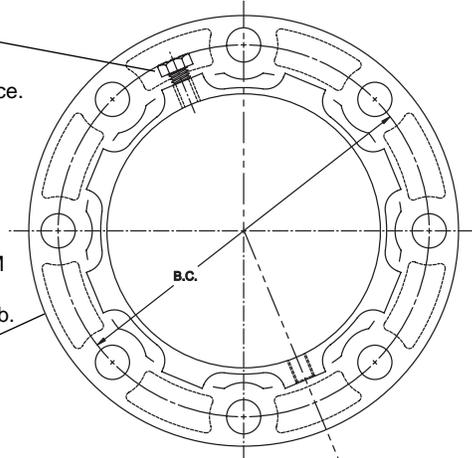

Gasket - Standard gasket
supplied with the Uni-
Flange Adapter Flange
- SBR Buna-S

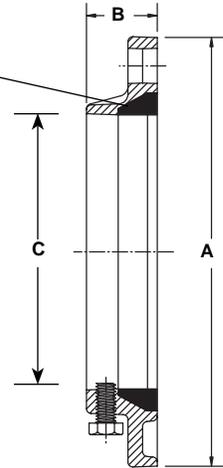

NOM. PIPE SIZE	STEEL PIPE		APPROX. WT. LBS.	PRESSURE RATING PSI	SET SCREWS		FLANGE			BOLT CIRCLE DIA.	✓ SUBMITTED ITEM(S)
	OD	CATALOG No.			NUMBER	SIZE	OD A	THICKNESS B	APPROX. ID C		
2"	2.375	UFA200-S-2	3.5	200	2	1/2"x1"	6"	1-13/16"	2-1/2"	4-3/4"	
2-1/2"	2.875	UFA200-S-25	4.0	200	4	1/2"x1"	7"	1-13/16"	3"	5-1/2"	
3"	3.500	UFA200-S-3	5.0	200	4	1/2"x1"	7-1/2"	1-13/16"	3-5/8"	6"	
4"	4.500	UFA200-S-4	7.7	200	4	1/2"x1"	9"	1-7/8"	4-5/8"	7-1/2"	
5"	5.563	UFA200-S-5	8.7	200	8	1/2"x1"	10"	1-7/8"	5-11/16"	8-1/2"	
6"	6.625	UFA200-S-6	10.0	200	8	1/2"x1"	11"	1-7/8"	6-3/4"	9-1/2"	
8"	8.625	UFA200-S-8	16.5	200	8	5/8"x1-1/4"	13-1/2"	2-1/4"	8-3/4"	11-3/4"	
10"	10.750	UFA200-S-10	22.0	175	12	5/8"x1-1/4"	16"	2-1/4"	10-7/8"	14-1/4"	
12"	12.750	UFA200-S-12	31.0	175	12	5/8"x1-1/4"	19"	2-1/4"	12-7/8"	17"	

FEATURES

- Restraint is provided by a set screw locking device similar to that used in mechanical joint retainer glands.
- The gasket is the standard AWWA transition gasket.
- Designed for ease of on-site installation. Eliminates bolt hole alignment problems. Allows for pipe deflection.
- Series 200 Adapter Flanges are not recommended for use on PVC pipe. Use the Uni-Flange Series 900 flanges instead.
- Optional Uni-Torque Set Screws are available for use with Series 200 Adapter Flanges for Steel Pipe, Schedule 40 and up. To order, add -UT to the catalog number. Example: UFA200-S-6-UT.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

07/12/06

Submitted By: