



Important Notice - Read Carefully
Ford Corporation Stop Installation Instructions



Key Valve Corp




Ballcorp


Ford Corporation Stops are designed to give you the ultimate in quality features. For best results follow these instructions.

INSTRUCTIONS AND PRECAUTIONS


- (1) Handle valve carefully. Protect threads..keep clean...Do not drop or throw valve. **Do not use a pipe wrench.**
- (2) Always use a suitable sealant or teflon tape on inlet threads.
- (3) Read and follow separate instructions for compression style outlet connections.
- (4) Use only a smooth-jawed, adjustable wrench that fully and evenly engages the wrench flat. Loose fitting wrenches and pipe wrenches will distort the valve and cause leaks.
- (5) Place wrench only on wrench flats provided on valve body, not on round surfaces. Never use tapping machine to complete tightening into water main. Always use 2 wrenches when connecting the service line, one to secure the corporation stop and one to tighten the connection.



**DO NOT USE A
PIPE WRENCH**



**USE A SMOOTH
WRENCH AND FULLY
ENGAGE WRENCH
FLATS**




**1-1/2" AND 2"
BALLCORPS**

**DAMAGE CAUSED BY IMPROPER TOOLS OR
HANDLING WILL VOID OUR WARRANTY**

(Continued on back of card)

- (6) Always install Key Corp with T-head positioned on side as illustrated.

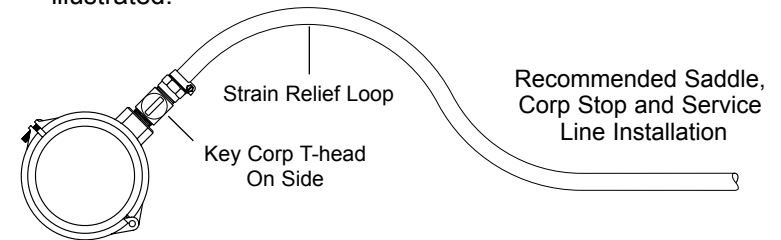

- (7) All Ford Key Corporation Stops are factory tested and pressure rated for 100 PSI per AWWA C800. Use Ballcorp Corporation Stops for higher pressures.
- (8) **Always pressure test for leaks before backfilling.**
- (9) Backfill and compact carefully around corporation and service line to prevent ground shifts, which could damage the valve and/or service connection.
- (10) Protect valve from freezing. Freezing can damage valve and cause leaks.
- (11) Consult pipe or tubing manufacturer for specific installation requirements.

WARRANTY - READ BEFORE INSTALLING

All merchandise is warranted to be free from defects in material and factory workmanship. We will provide free of charge new products in equal quantities for any that prove defective within one year from the date of shipment from our factory. **Manufacturer should not be liable for any loss, damage, or injury, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatever in connection therewith. No claims for labor or consequential damage will be allowed.** The foregoing may not be changed except by agreement signed by an officer of the manufacturer.

**DAMAGE CAUSED BY IMPROPER TOOLS OR
HANDLING WILL VOID OUR WARRANTY**



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana, USA 46992-0443

Telephone: 260/563-3171 • FAX: 1-800-826-3487

Overseas FAX: 260/563-0167 • <http://www.fordmeterbox.com>