

**Features**

- Kinesis™ technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments.
- Below-counter valving reduces the faucet footprint and provides easier service.
- Design-forward aesthetic for commercial bathroom spaces.
- 0.5 gpm (1.9 lpm) maximum flow rate.
- Requires K-13480 single or K-13481 multiple AC adapter unit.
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water.
- Vandal-resistant aerated outlet.
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation.
- 8-9/16" (217 mm) spout reach.
- Complies with the Safe Drinking Water Act (SDWA).

**ADA** **CSA B651** **OBC****Codes/Standards**

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

**Material**

- Brass spout.
- Cast brass valve.

**Installation**

- Wall-mount.

**Required Products/Accessories**

K-13480-A AC Single Supply

**or**

K-13481-A Multi-Outlet Power Supply

**Included Components**

Additional Components:

K-7129-A Drain

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

**Available Colors/Finishes***Color tiles intended for reference only.***Color    Code    Description**


CP    Polished Chrome



BN    Vibrant® Brushed Nickel



BL    Matte Black

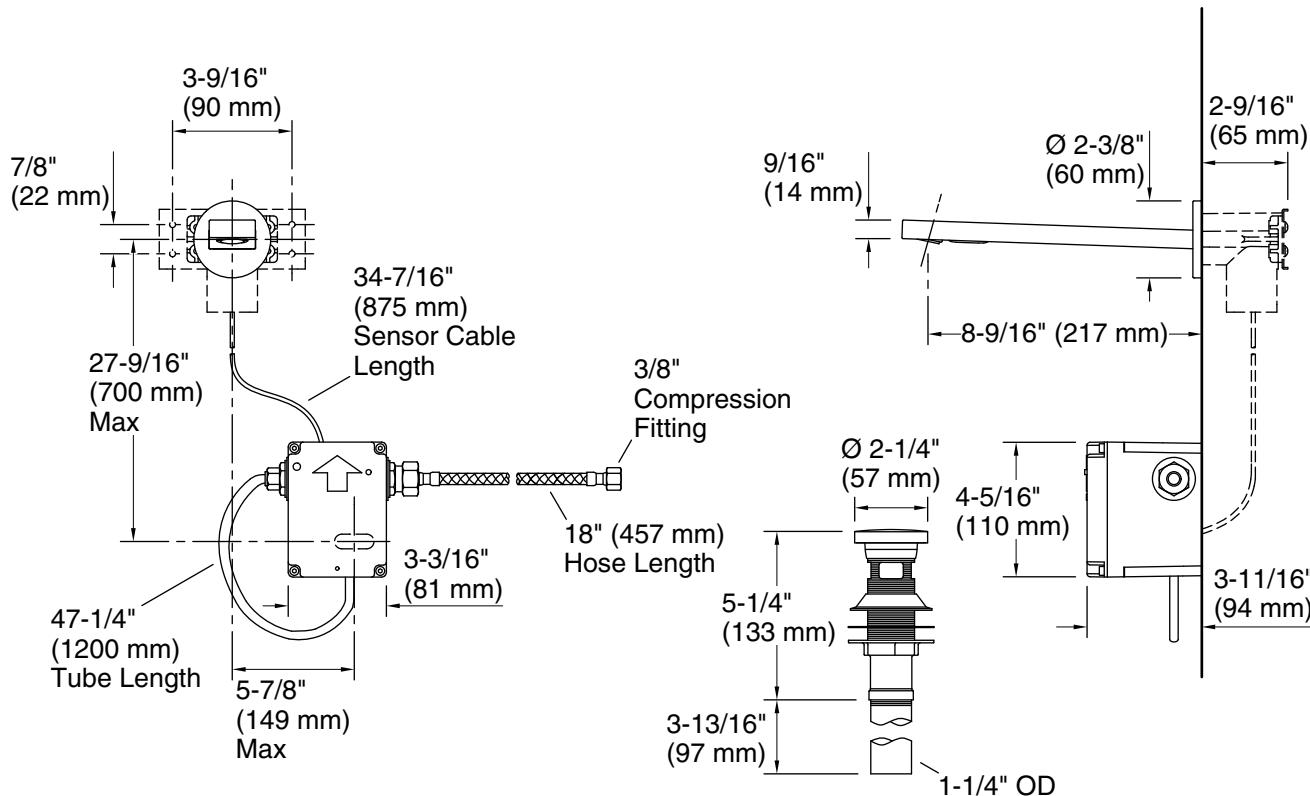

### Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

120/240 V, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Power source: Hardwire - AC and Plug - AC, not included

#### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Cast brass

Drain included: Yes

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.