

# **Submittal Data: PAA-A36(B)(C)A1-M & PUZ-HA36NKA**

**36,000 BTU/H Multi Position A-Coil Cold Climate Heat Pump System**

Job Name:	Location:		
Purchaser:	Submitted By:		
Submitted To:	Reference:	Approval:	Construction:
Engineer:	Date:	Application:	

PAA-A36BA1-M

PAA-A36CA1-M



Optional Controller

Images provided for reference purposes only

Outdoor Standard Features:	Description:
Blue Fin Coating	Prolong condenser operating life
Inverter Motor	Energy efficient operation with variable speed DC motor
Built in base pan heater	Automated control to prevent premature failure of condenser coil
Auto mode	Automatically switches between heating & cooling modes
Fast Auto restart	Automatically restarts after power failure return
Automated compressor cutout	Prevents inefficient operation & protects compressor
Cold climate heat pump	
Indoor Standard Features:	Description:
Economic Balance Point	Allows the customer to choose the outdoor ambient temperature to switch from heat pump to furnace
Capacity Balance Point	Allows the customer to determine the length of time (24 to 29 minutes) the heat pump will attempt to heat the space before switching to furnace (as an auxiliary heat source)
Emergency Mode	The system will operate in furnace mode when in error
Auto Restart Function	Auto-recovery after power failure (must be activated on controller mode #1 set to 2)
Description: (Optional Accessories)	Model No.
Front Windscreen	CM-S-FR-NKMU (x2 required)
Front Windscreen Blocker	CM-S-BLK-NKMU (x2 per box)
Rear Snow Guard	SG-1-RE
Side Snow Guard	SG-1-SD

**Note:**

- (1) To be installed by a trained and licensed refrigeration mechanic;
- (2) Suitable for installation with an ANSI certified gas furnace (Z21.47/CSA2.3);
- (3) Not suitable for installation with OIL or DRUM type furnaces;
- (4) Supply air temperature must not exceed 200°F (93.3 °C);
- (5) Furnace output capacity shall not be greater than 300% of the rated PAA cooling capacity;
- (6) Configure furnace fan such at the airflow is greater than or equal to 350 CFM per ton and less than or equal to 400 CFM per ton of nominal PAA unit cooling capacity. In down flow orientation, the furnace fan should be configured to maintain an airflow face velocity below 350 ft/min to prevent water blow-off;
- (7) For detailed requirements, review PAA Installation Manual at: <http://www.mitsubishitechno.ca/>

**Note:**

1. Mitsubishi Electric Sales Canada Inc. (MESCA) supports the use of only MESCA supplied and approved components and accessories for proper functioning of the unit(s). Use of non - MESCA supported components and accessories will affect warranty coverage. MESCA recommends (A) consideration of all applicable design and application parameters and requirements specific to any project.
2. Should any person change this document in any manner whatsoever without MESCA's written permission, the document shall be of no force and effect and any change shall be deemed to be a representation and warranty made by that person and not MESCA. That person, and not MESCA, shall assume full responsibility for the consequences of such changes. MESCA assumes no responsibility for any consequences in such cases.

# **Submittal Data: PAA-A36(B)(C)A1-M & PUZ-HA36NKA**

## **Performance:**

Cooling at 95°F <sup>*1</sup>	Rated Capacity	Btu/h	36,000
	Capacity Range	Btu/h	16,600 - 36,000
	Rated Power Input	W	3,270
	Power Input Range	W	1,090 - 3,270
	Moisture Removal	pints/h	7.5
	Sensible Heat Factor		0.77
Heating at 47°F <sup>*1</sup>	Rated Capacity	Btu/h	38,000
	Capacity Range	Btu/h	20,500 - 42,000
	Rated Power Input	W	3,530
	Power Input Range	W	1,340 - 3,530
Heating at 17°F <sup>*2</sup>	Maximum Capacity	Btu/h	38,000
	Rated Capacity	Btu/h	28,200
	Capacity Range	Btu/h	14,200 - 38,000
	Maximum Power Input	W	5,640
	Rated Power Input	W	3,710
	Power Input Range	W	1,300 - 5,640
Heating at 5°F <sup>*3</sup>	Maximum Capacity	Btu/h	38,000
	Maximum Power Input	W	5,400
Heating at -5°F	Maximum Capacity	Btu/h	34,100
	Maximum Power Input	W	5,490
Heating at -13°F	Maximum Capacity	Btu/h	30,400
	Maximum Power Input	W	5,510

## **Efficiency:**

SEER / SEER2		15.5 / 14.3
EER / EER2		11.0 / 10.5
HSPF / HSPF2 (IV) / (V)		9.80 / 8.80 / TBA
COP at 47°F <sup>*1</sup>	Rated Capacity	3.15
COP at 17°F <sup>*2</sup>	Maximum Capacity	1.97
COP at 5°F <sup>*3</sup>	Maximum Capacity	2.10

## **Electrical:**

Power Supply		208/230V, 1Ph, 60Hz
Voltage: Indoor - Outdoor, S1-S2	V AC	AC 208/230V
Voltage: Indoor - Outdoor, S2-S3	V DC	10-24VDC
Short-circuit Current Rating (SCCR)	kA	5
Recommended Fuse/Breaker Size (Outdoor)	A	35
Recommended Wire Size (Indoor - Outdoor)	AWG	14

## **Outdoor Temperature Operation Range:**

Cooling	°F (°C)	*4 0 to 115 (-18 to 46)
Heating	°F (°C)	D.B. -13 to 75 (-25 to 24), W.B. -13 to 59 (-25 to 15)
Cooling Operation Thermal Lock-out / Re-start Temperatures	°F (°C)	-1 / 3 (-18 / -16)
Heating Operation Thermal Lock-out / Re-start Temperatures	°F (°C)	-22 / -13 (-30 / -25)

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

NOTES : \*1. Rating conditions (cooling)-Indoor: D.B. 80°F (26.7°C), W.B. 67°F (19.4°C) Outdoor: D.B. 95°F (35°C), W.B. 75°F (23.9°C)  
(heating)-Indoor: D.B. 70°F (21.1°C), W.B. 60°F (15.6°C) Outdoor: D.B. 47°F (8.3°C), W.B. 43°F (6.1°C)

\*2. Conditions (heating)-Indoor: D.B. 70°F (21.1°C), W.B. 60°F (15.6°C) Outdoor: D.B. 17°F (-8.3°C), W.B. 15°F (-9.4°C)

\*3. Conditions (heating)-Indoor: D.B. 70°F (21.1°C), W.B. 60°F (15.6°C) Outdoor: D.B. 5°F (-15°C), W.B. 5°F (-15°C)

\*4. Cooling at 0 °F, wind baffle accessory required. Without wind baffle accessory, the minimum temperature will be 23°F (-5°C).

<sup>A)</sup> CFM @ 350 per tons.

# Submission Data: PAA-A36(B)(C)A1-M & PUZ-HA36NKA

## Indoor Unit Specifications:

Models	Airflow rate*	W: In.	D: In.	H: In.	W: mm	D: mm	H: mm	kg (lbs)
PAA-A36BA1-M	1050	17.5	21.3	31.0	445	543	785	31 (67)
PAA-A36CA1-M	1050	21.0	21.3	31.0	534	543	785	37 (82)
* Target airflow rate for Y or Y1 signal				Not including connection pipes.				
Internal static pressure	in. WG	0.3 (According to AHRI - 210/240, where this is the maximum allowable internal static pressure for "Coil Only" systems)						
	[Pa]	75 (According to AHRI - 210/240, where this is the maximum allowable internal static pressure for "Coil Only" systems)						
MCA				A		0.2		
Drain Pipe Size				In. (mm)		3/4 (19.05)		
External Finish Color						Galvanized Steel		

## Outdoor Unit Specifications:

MCA	A	26
MOCP	A	42
Fan Motor Output	kW	0.074 + 0.074
Airflow Rate (Cooling/Heating)	CFM	3,880 / 3,880
Sound Pressure Level, Cooling1	dB(A)	52
Sound Pressure Level, Heating2	dB(A)	53
Refrigerant Control	Electronic Expansion Valve	
Compressor Oil Type / Charge	oz.	FV50S / 47 oz
External Finish Color	Ivory Munsell No.3Y 7.8/1.1	
Unit Weight	kg (lbs)	261 (118)
Unit Dimensions	W: In. (mm)	41-11/32 (1,050)
	D: In. (mm)	12-63/64 + 63/64 (330 +25)
	H: In. (mm)	52-43/64 (1,338)
Gas Pipe Size O.D. (Flared)	In. (mm)	5/8 (15.88)
Liquid Pipe Size O.D. (Flared)	In. (mm)	3/8 (9.52)
Maximum Height Difference	Ft. (m)	100 (30)
Maximum Piping Length	Ft. (m)	100 (30)


## Description: (Optional Controls)

Model No.
Wired wall mounted remote control
Wireless wall mounted remote control
North American T-Stat Interface

## Indoor Unit Dimensions:


Model	A mm (inches)	B mm (inches)	C mm (inches)	D mm (inches)	E mm (inches)
PAA-A36BA1	445.0 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)	785.2 (31)	543 (21-3/8)
PAA-A36CA1	534.6 (21)	479.4 (18-7/8)	499 (19-5/8)	785.2 (31)	543 (21-3/8)

## Indoor Unit Outline and Dimensions:

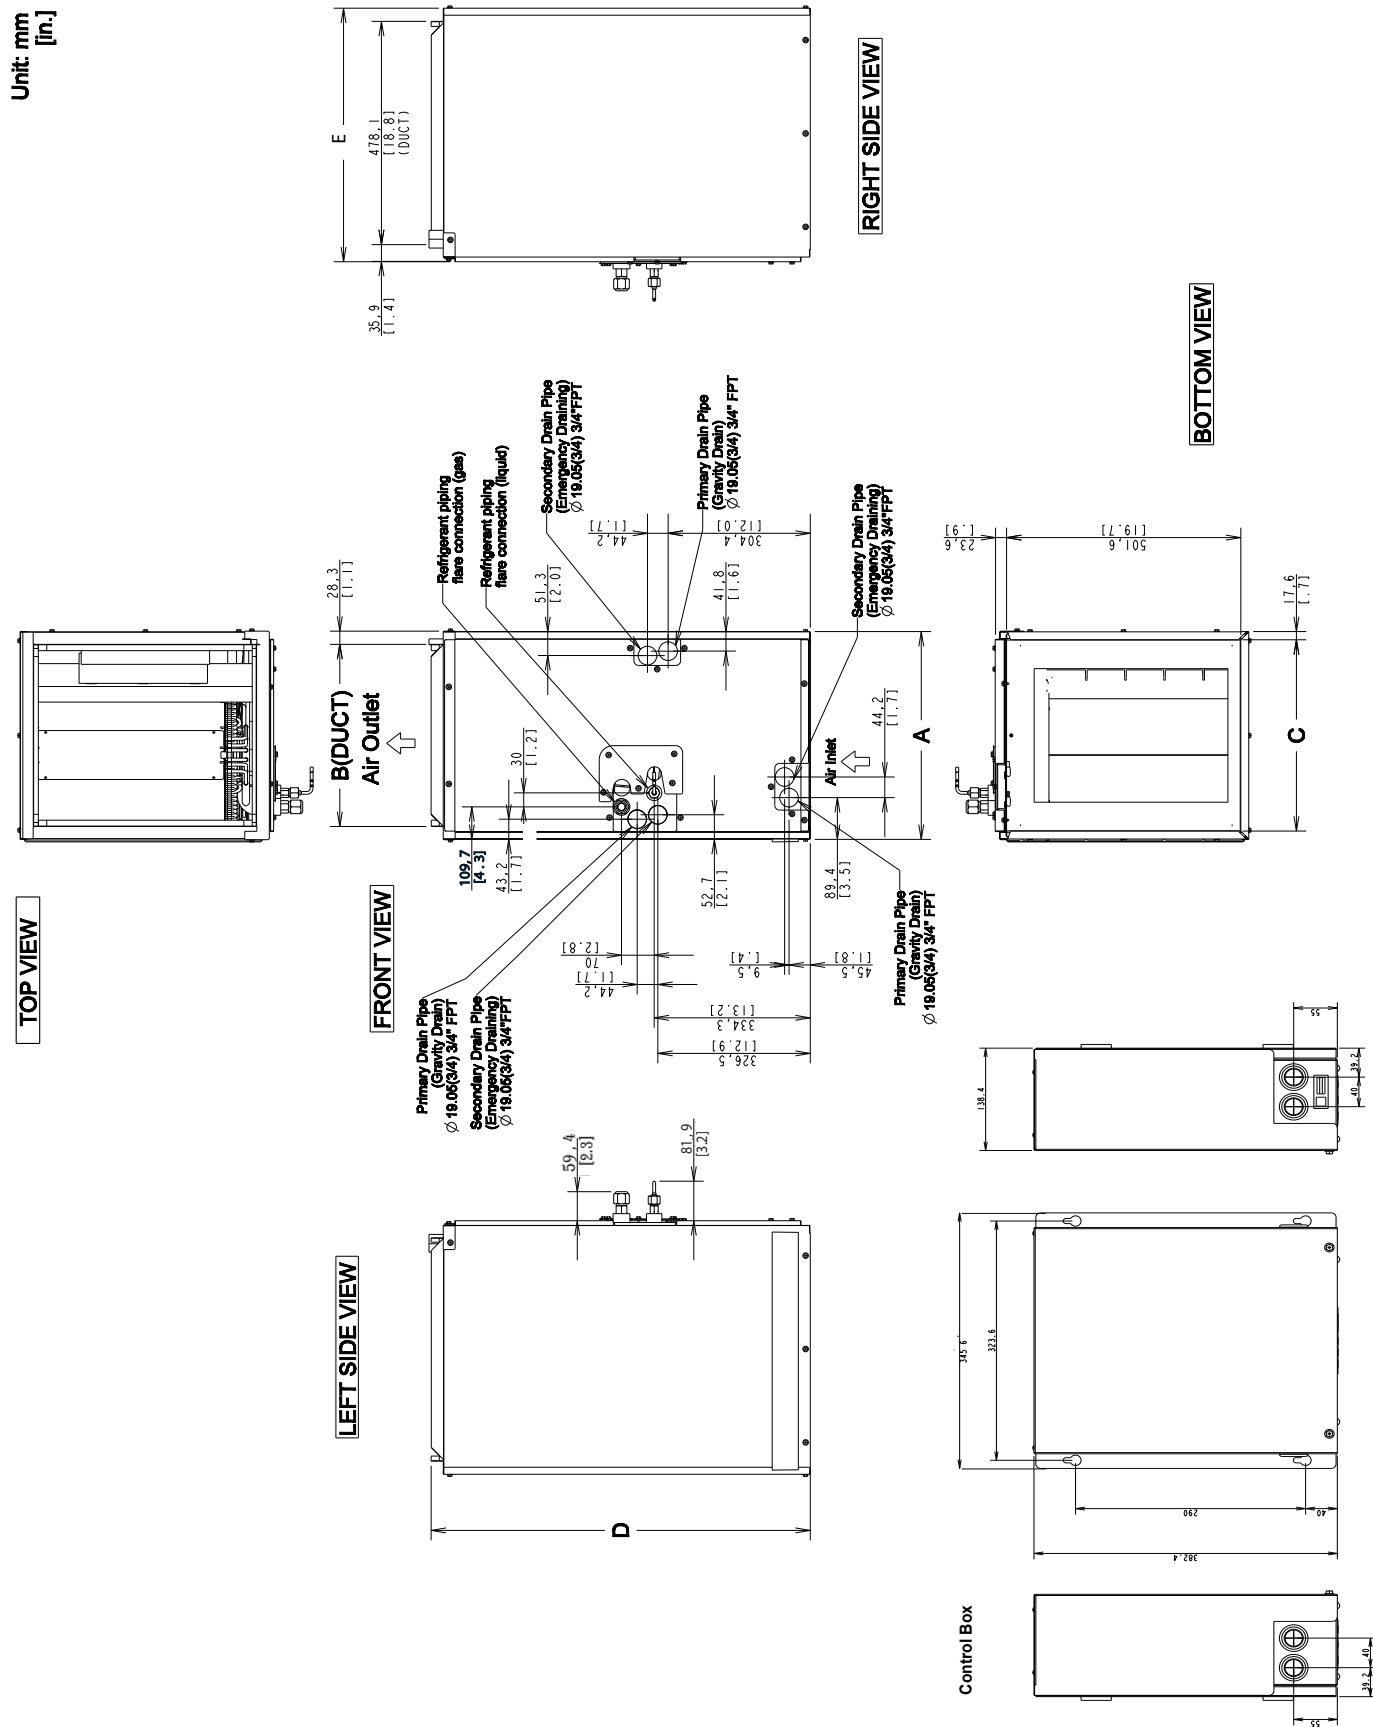

## Outdoor Unit Outline and Dimensions:

Unit: mm<in>

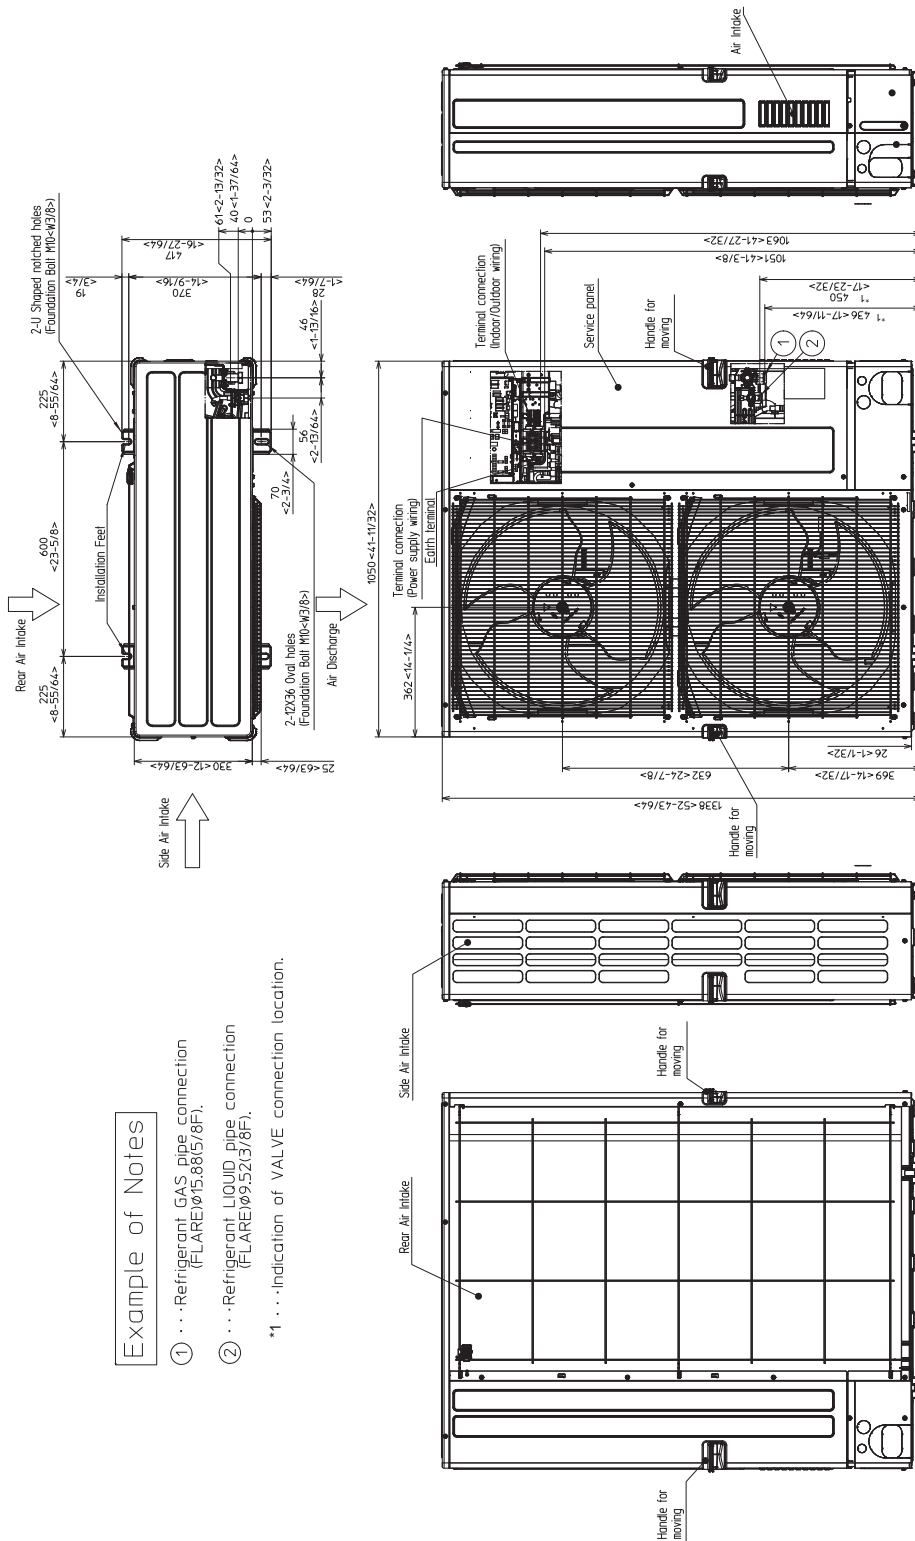

### Example of Notes

- ① ...Refrigerant GAS pipe connection (FLARE)Ø15.88(5/8F).
  - ② ...Refrigerant LIQUID pipe connection (FLARE)Ø9.52(3/8F).
- \*1 ...Indication of VALVE connection location.

