SIMPLE SELECT DUAL SHOWER HEAD SHOWER SYSTEM

SKU: 949744



CONTENTS

TRIM	PAGE 2
ROUGH-IN VALVE	PAGE 3
SHOWER HEAD	PAGE 4
SHOWER ARM	PAGE 5


FEATURES

Shape: Square Handle Type: Lever Features: Pressure-Balanced Assembly Required: Yes Design: Modern Mounting Hardware Included: Yes Shower Head Installation Type: Wall Number of Shower Heads: 2 Shower Head Material: ABS Shower Head Spray: Single Function Shower Arm Included: Yes Shower Head Swivel: Yes Diverter Included: Yes Diverter Outlets: 2 Dual Functionality Allows for One or Both Shower Features to Run at a Time Single Function Shower Heads (Full Spray) Easy-Clean Silicone Nozzles Optional Rough-In Valve: Pressure Balanced With Integral Stops One-Piece Cartridge Design for Ease of Maintenance Back-to-Back Capability Adjustable Temperature Limit Stop Quick Remove Plaster Guard Easy Mounting Brackets With Restrictor Installed, This Valve is Compliant With CALGreen and the California Plumbing Code

REVISED 09/13/2022

SIMPLE SELECT TRIM

SKU: 949744

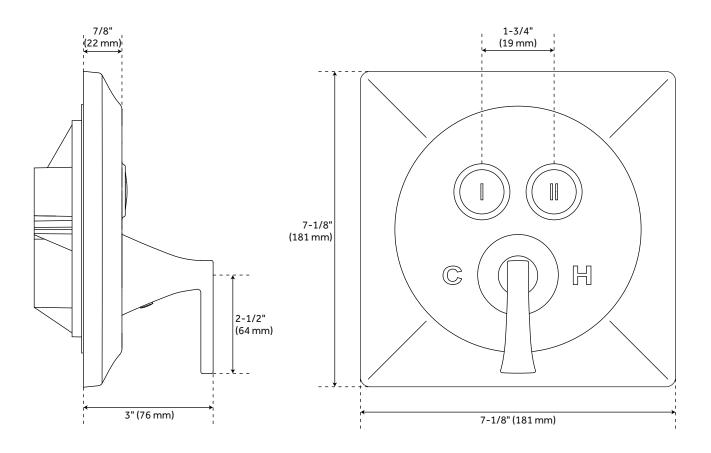

FEATURES

Material: Brass Width: 7-1/8" Height: 7-1/8" Depth: 3" Connection: 1/2" NPT

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 ICC/ANSI A117.1 (when installed according to ADA standards) Massachusetts Accepted

LISTED ID:

SHVL8040

PRODUCT IMAGE





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 2 Code: SHVL8040Z


(ISI) SIGNATURE HARDWARE See Web


See Website For Warranty Information www.signaturehardware.com/warranty


www.signaturehardware.com

OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 949744







STANDARD:

Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	3.4	5	6.3	7.4
	Outlet A (gpm)	1.2	2.2	2.9	3.5
	Outlet B (gpm)	2.2	2.8	3.4	3.9
Separate (A or B Closed)	Outlet A (gpm)	2.5	3.9	4.8	5.5
	Outlet B (gpm)	2.5	3.9	4.8	5.5

WITH FLOW RESTRICTOR:

Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	1.20	1.40	1.53	1.64
	Outlet A (gpm)	0.43	0.56	0.64	0.68
	Outlet B (gpm)	0.77	0.84	0.89	0.96
Separate (A or B Closed)	Outlet A (gpm)	1.17	1.38	1.49	1.59
	Outlet B (gpm)	1.16	1.39	1.49	1.60

FEATURES

Length: 4-7/8" Width: 4-3/8" Depth: 5-1/2" Connection: 1/2"-14 NPT

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 ASSE 1016 Type P Massachusetts Accepted








All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.


PAGE 3 Code: SH5001SSG

ISI) SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty

SHOWER HEAD SKU: 949744

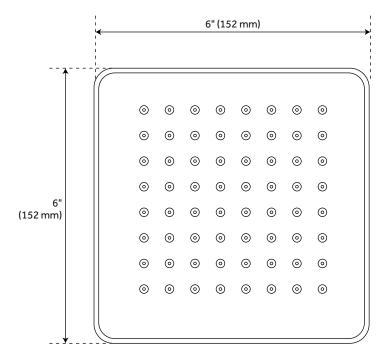



FEATURES

Material: ABS Length: 6" Width: 6" Height: 3-5/8" Connection: 1/2" IPS Shower Head Flow Rate: 1.8 gpm (6.8 L/min) max (@ 80 psi

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 WaterSense CEC Listed Massachusetts Accepted

LISTED ID:

SHSH2060G

PRODUCT IMAGE





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.


PAGE 4 Code: SHSH2060GZ

(ISI) SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty

www.signaturehardware.com

SHOWER ARM SKU: 949744

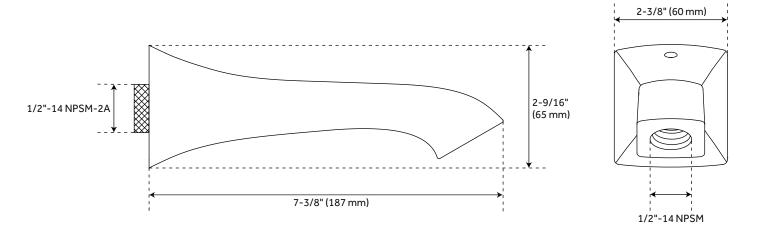

FEATURES

Material: Brass Length: 7-3/8" Width: 2-3/8" Height: 2-9/16" Connection: 1/2" IPS

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 Massachusetts Accepted

PRODUCT IMAGE





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 5 Code: SHSK88Z





See Website For Warranty Information www.signaturehardware.com/warranty