

## Santa Rosa™

Comfort Height® Compact Toilet K-3810

#### **Features**

- Vitreous china.
- Elongated bowl.
- AquaPiston® flushing system.
- One-piece.
- Less supply.
- 12" (305 mm) rough-in.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) glazed trapway.
- Includes left-hand polished chrome trip lever, seat, and cover.
- 11" (279 mm) x 8-1/8" (206 mm) water area.
- 27-3/4" (705 mm) x 18-3/4" (476 mm) x 28-3/16" (716 mm).

#### **Recommended Accessories**

K- 4636 Toilet Seat

K- 4650 Toilet Seat

K- 4731-C Commercial Heavy-duty Toilet Seat

K-7637 Angle Supply with Stop (single)

## **Optional Accessories**

K- 9169-L Trip lever

### Components

Product includes:

K- 4774 Toilet Seat

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





ADA CSA B651

1 OBC

# Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.


| Color | Code | Description  |
|-------|------|--------------|
|       | 0    | White        |
|       | 96   | Biscuit      |
|       | 47   | Almond       |
|       | NY   | Dune         |
|       | 95   | Ice™ Grey    |
|       | G9   | Sandbar      |
|       | 7    | Black Black™ |





## Santa Rosa™

Comfort Height® Compact Toilet K-3810

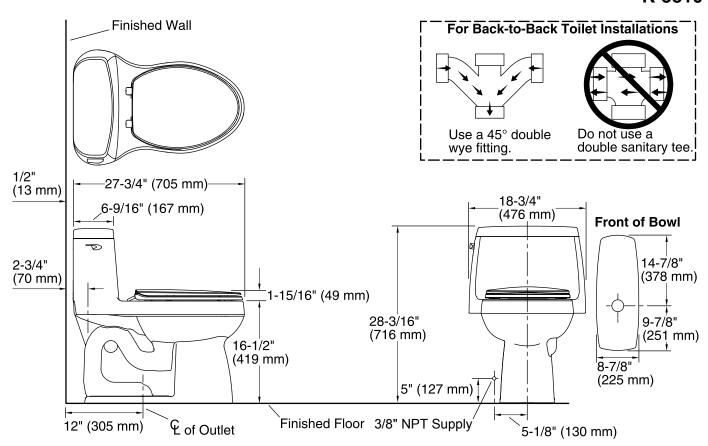

## **Technical Information**

All product dimensions are nominal. Toilet type:

One-piece

Bowl shape: Compact Elongated front

Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 8-1/8" (279 mm x 206 mm)

Rim to water surface: 6-1/4" (159 mm) Rough-in: 12" (305 mm) Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

The model is acceptable for left-hand Accessible compartment installations only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

